


PROFILE FOR ROLLING SHUTTER PVC 3D FLEX

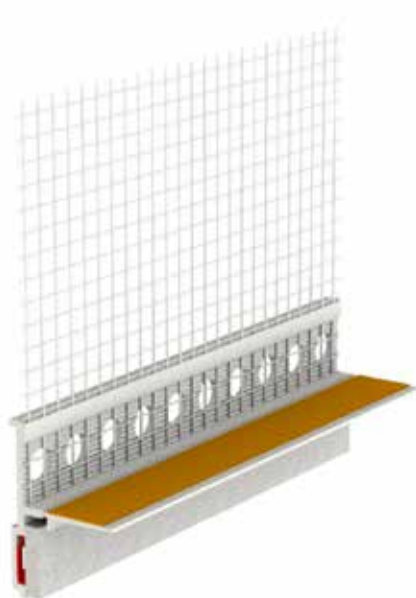

INDEX

1. Code registry
2. Description
3. Use
4. Technical specification

1. CODE REGISTRY

Code	Description	Measure mm	Quantity pkg.	Weight (kg/pkg.)	Pkg. / Pallet
CAR40-1490	Profile for rolling shutter PVC 3D Flex	2.400	60 m (25 bars)	8	40 pkg. / 1.000 m.

MATERIAL Made of PVC and fiberglass net

2. DESCRIPTION

PVC profile with fiberglass mesh, with PE tape, equipped with removable flap with fixing tape for fixing the frame.


Compliant Standard UNI 1175: 2018 3D Class.

3. USE

Used on the window frame as a sealed fitting on the bracket of the plaster. It is equipped with a removable adhesive protective flap that allows the protection of the glass during the shaving phase.

Promotes the reduction of thermal bridges and absorbs the dilatations.

PROFILE FOR ROLLING SHUTTER PVC 3D FLEX

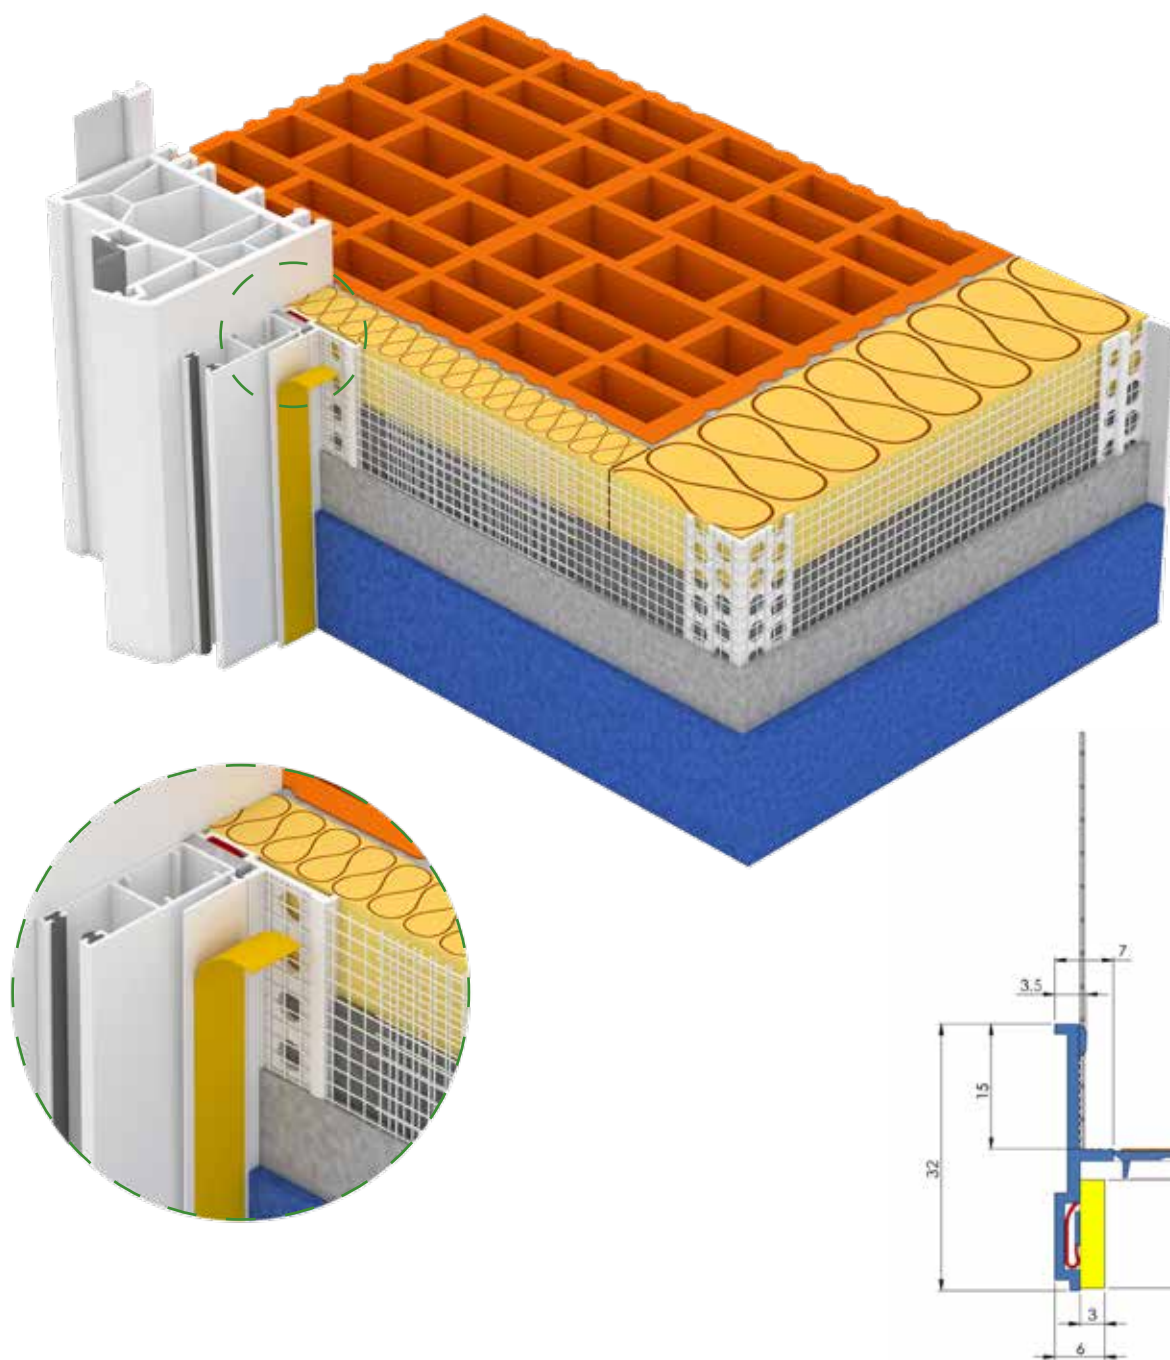

4. TECHNICAL SPECIFICATION

Code	Description	U.M.	Price
Dak.B.CAR40.1490	PVC profile with fiberglass mesh, with PE tape, equipped with removable flap with fixing tape for fixing the frame. Compliant Standard UNI 1175: 2018 3D Class.		
Dak.B.CAR40.1490	Dimensions 2.400 mm.....	pc.	-