


ANTI-HEEL STRONG GRATING

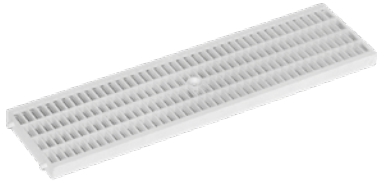

INDEX


1. Code Registry
2. Use
3. Technical Specification

1. CODE REGISTRY

Code	Description	Dimension (mm)	Weight	Colour	Pkg. / Pallet
POZ90-1351	Anti-heel Strong Grating 130	130 x 500 x 20	0,76 kg/pc.	Grey	1 pc. / 850 pcs
POZ90-1351F	Anti-heel Strong Grating 130 - Sand	130 x 500 x 20	0,76 kg/pc.	Sand	1 pc. / 850 pcs
POZ90-1361	Anti-heel Strong Grating 200	200 x 500 x 20	1,26 kg/pc.	Grey	1 pc. / 462 pcs

MATERIAL

Made of PP (polypropylene)

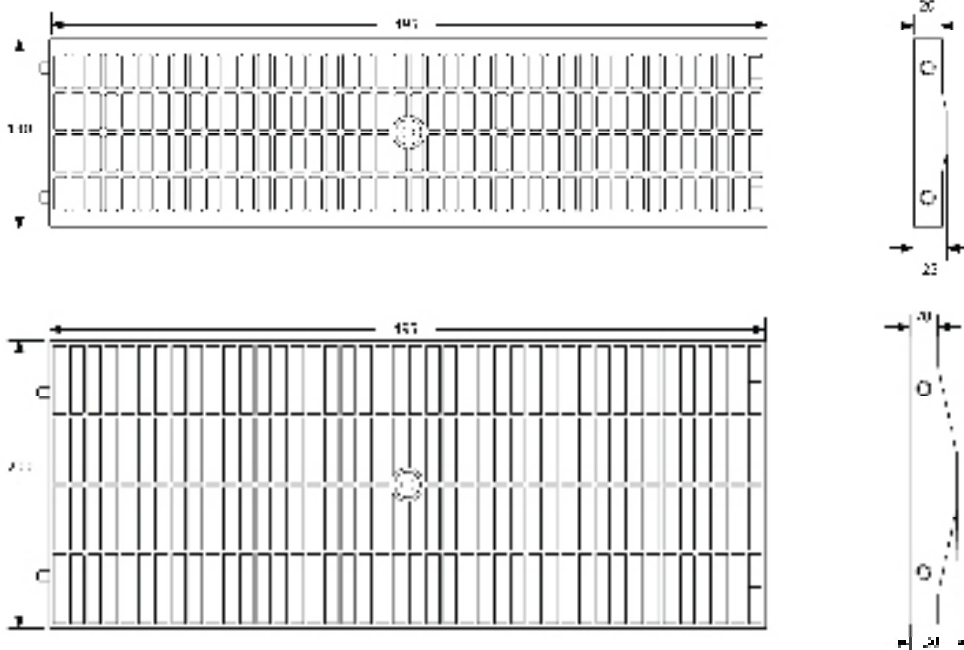

	material	weight	water passage
POZ90-1351	Polypropylene	0,76 kg	357 cm ²
POZ90-1361	Polypropylene	1,26 kg	535 cm ²

ANTI-HEEL STRONG GRATING

2. USE

Use in pedestrian areas and in areas of occasional passage (not longitudinal) of motorcycles and/or cars not exceeding the weight of 1.5 tons. The anti-heels texture suggests the use in domestic environments (houses, swimming pool, gardens), sports centers and green areas.

3. TECHNICAL SPECIFICATION

Specification	Description	Unity	Price
Dak.D.POZ90.13x1x	Supply and installation to grating for channel, with anti-heel design. Dimensions: 130 x 20 x 500 mm or 200 x 20 x 500 mm. Available in light grey or sand. Made of PP (polypropylene) Use in pedestrian areas and in areas of occasional passage (not longitudinal) of motorcycles and/or cars not exceeding the weight of 1.5 tons. The anti-heels texture suggests the use in domestic environments (houses, swimming pool, gardens), sports centers and green areas.		
Dak.D.POZ90.1351	Dimension 130 x 500 - Grey.....	pc.	-
Dak.D.POZ90.1351F	Dimension 130 x 500 - Sand.....	pc.	-
Dak.D.POZ90.1361	Dimension 200 x 500 - Grey.....	pc.	-