


EXTRA STRONG GRATING 130 AND 200

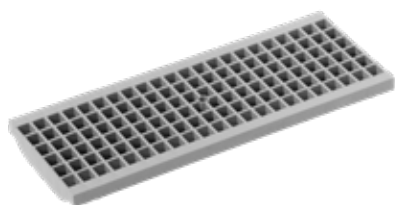

INDEX


1. Code Registry
2. Use
3. Technical Specification

1. CODE REGISTRY

Code	Description	Dimension (mm)	Weight	Colour	Pkg. / Pallet
POZ90-1351XS	Extra strong grating Grey 130	130 x 20 x 500	1,00 kg/pc.	Grey	1 pc. / 630 pcs
POZ90-1351XSN	Extra strong grating Black 130	130 x 20 x 500	1,00 kg/pc.	Black	1 pc. / 630 pcs
POZ90-1361XS	Extra strong grating Grey 200	200 x 20 x 500	1,28 kg/pc.	Grey	1 pc. / 300 pcs
POZ90-1361XSN	Extra strong grating Black 200	200 x 20 x 500	1,28 kg/pc.	Black	1 pc. / 300 pcs

MATERIAL

Made of PP (polypropylene) fiber-reinforced.

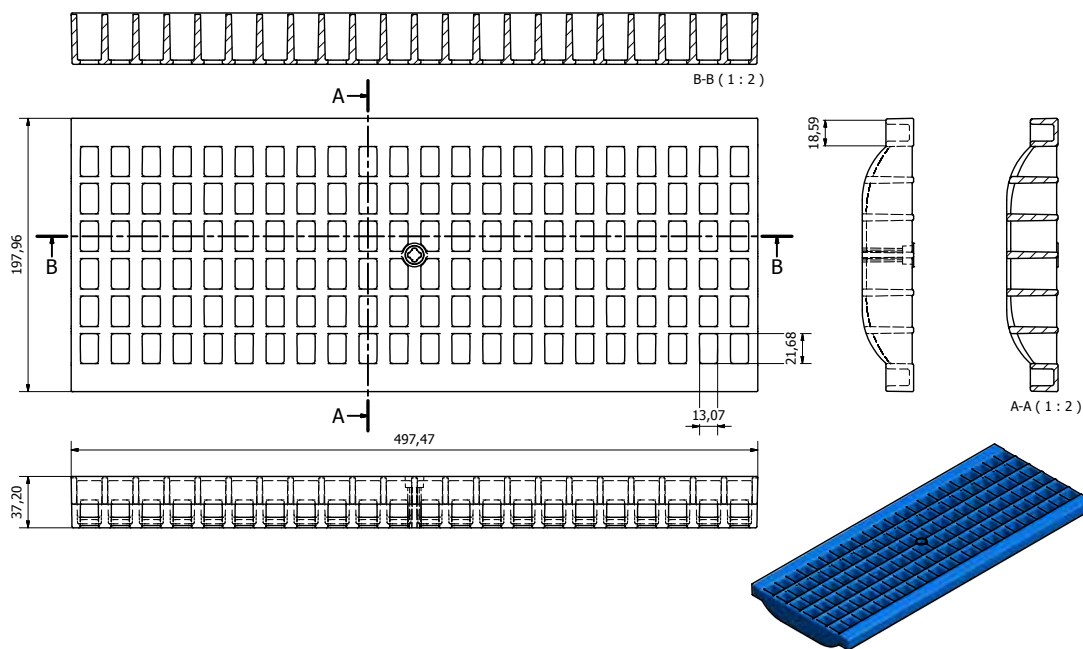

	material	weight	water passage
POZ90-1351XS	Polypropylene	1,00 kg	250 cm ²
POZ90-1361XS	Polypropylene	1,28 kg	375 cm ²

EXTRA STRONG GRATING 130 AND 200

2. USE

It can be used in pedestrian areas or in areas with light vehiculous traffic not longitudinal way.

3. TECHNICAL SPECIFICATION

Specification	Description	Unity	Price
Dak.D.POZ90.13x1XSx	Supply and installation to grating for channel Extra strong grating for channel, with ribs at the intrados (lower surface), with a variable section that increases its resistance to shear stress and the load bearing capacity. From internal laboratory test, the payload of the grating is 21 kN (approximately 2100 kg). Made with intermediate hole for fixing the locking elements on channel Taurus or Pegasus Plus. Dimensions: 130 x 20 x 500 or 200 x 20 x 500 mm. Available in light grey or black. Made of PP (polypropylene) fiber-reinforced. It can be used in pedestrian areas or in areas with light vehiculous traffic not longitudinal way.		
Dak.D.POZ90.1351XS	Extra Strong Grating - Grey - 130 x 20 x 500 mm.....	pc.	-
Dak.D.POZ90.1351XSN	Extra Strong Grating - Black - 130 x 20 x 500 mm.....	pc.	-
Dak.D.POZ90.1361XS	Extra Strong Grating - Grey - 200 x 20 x 500 mm.....	pc.	-
Dak.D.POZ90.1361XSN	Extra Strong Grating - Black - 200 x 20 x 500 mm.....	pc.	-