

RETRACTABLE CEILING LADDER AND ACCESSORIES



INDEX

1. Code Registry
2. Description
3. Use
4. Fire resistance features
5. Accessories
6. Technical Specification

1. CODE REGISTRY

Code	Description	(mm)	Weight	Pkg. / Pallet
SCA01-590/0	Retractable ceiling ladder and accessories	500 x 700	45 kg/pc.	1 pc. / 4 pcs.
SCA01-590/1	Retractable ceiling ladder and accessories	500 x 800	45 kg/pc.	1 pc. / 4 pcs.
SCA01-590/8	Retractable ceiling ladder and accessories	500 x 900	45 kg/pc.	1 pc. / 4 pcs.
SCA01-590/2	Retractable ceiling ladder and accessories	500 x 1.000	45 kg/pc.	1 pc. / 4 pcs.
SCA01-590/1S	Retractable ceiling ladder and accessories	600 x 700	45 kg/pc.	1 pc. / 4 pcs.
SCA01-590/3S	Retractable ceiling ladder and accessories	600 x 800	45 kg/pc.	1 pc. / 4 pcs.
SCA01-590/4S	Retractable ceiling ladder and accessories	600 x 900	45 kg/pc.	1 pc. / 4 pcs.
SCA01-590/5S	Retractable ceiling ladder and accessories	600 x 1.000	45 kg/pc.	1 pc. / 4 pcs.
SCA01-590/6S	Retractable ceiling ladder and accessories	600 x 1.100	45 kg/pc.	1 pc. / 4 pcs.
SCA01-590/7S	Retractable ceiling ladder and accessories	600 x 1.200	45 kg/pc.	1 pc. / 4 pcs.
SCA01-590/2S	Retractable ceiling ladder and accessories	700 x 700	45 kg/pc.	1 pc. / 3 pcs.
SCA01-590/3	Retractable ceiling ladder and accessories	700 x 800	45 kg/pc.	1 pc. / 4 pcs.
SCA01-590/4	Retractable ceiling ladder and accessories	700 x 900	45 kg/pc.	1 pc. / 4 pcs.
SCA01-590/5	Retractable ceiling ladder and accessories	700 x 1.000	45 kg/pc.	1 pc. / 4 pcs.
SCA01-590/6	Retractable ceiling ladder and accessories	700 x 1.100	45 kg/pc.	1 pc. / 4 pcs.
SCA01-590/7	Retractable ceiling ladder and accessories	700 x 1.200	45 kg/pc.	1 pc. / 4 pcs.
SCA01-590/X	Retractable ceiling ladder and accessories	-	45 kg/pc.	1 pc. / - pc.

MATERIAL

The entire scale is made of tropicalized steel, powder sealed steel while the frame is made of galvanized steel, white enamelled finish.



RETRACTABLE CEILING LADDER AND ACCESSORIES

2. DESCRIPTION

“Supra” is made of tropicalized and hot enamelled steel, with bolted steps to allow for replacement and/or addition.

Available in a wide range of sizes, Supra is equipped with a fixing system that allows it to be positioned even on uneven slabs.

The special shape of the steps is extremely effective as a holding aid when using the ladder. The user can hold on symmetrically, either to the right or to the left, maintaining a position very close to the ladder axis, all with the benefit of feeling much safer while using it.

N.B.: Tread width 80 mm.

The steel is tropicalised and hot enamelled.

It is usually used inside houses to reach floors without taking up too much space with a fixed ladder.

Minimum hole size: 500 x 700 mm

Maximum hole size: 1000 x 1400 mm

Maximum load capacity: 150kg

Minimum/maximum slab height: 140/230 mm (if higher than 230mm, please ask for special screws)

Can be made to measure

Approximate opening (l' x l²)			
Code	l' x l² (mm)	A (mm)	B (mm)
SCA01-590/0	500 x 700	2200 - 3200	300
SCA01-590/1	500 x 800	2200 - 3200	300
SCA01-590/8	500 x 900	2200 - 3200	300
SCA01-590/2	500 x 1.000	2200 - 3200	300
SCA01-590/1S	600 x 700	2200 - 3200	320
SCA01-590/3S	600 x 800	2200 - 3200	320
SCA01-590/4S	600 x 900	2200 - 3200	320
SCA01-590/5S	600 x 1.000	2200 - 3200	320
SCA01-590/6S	600 x 1.100	2200 - 3200	320
SCA01-590/7S	600 x 1.200	2200 - 3200	320
SCA01-590/2S	700 x 700	2200 - 3200	400
SCA01-590/3	700 x 800	2200 - 3200	400
SCA01-590/4	700 x 900	2200 - 3200	400
SCA01-590/5	700 x 1.000	2200 - 3200	400
SCA01-590/6	700 x 1.100	2200 - 3200	400
SCA01-590/7	700 x 1.200	2200 - 3200	400
SCA01-590/X	Min. 500 x 700 Max 900 x 1400		-
* custom-made			
Footprint: dimensions C and R with different heights (A)			
A	C	R	
3200	1400	2100	
3100	1300	2000	
3000	1200	1850	
2900	1300	1800	
2800	1450	1750	
2700	1650	1700	
2600	1400	1650	
2500	1350	1600	
2400	1000	1650	
2300	1250	1600	
2200	1350	1550	

A Height from floor to ceiling

B Step width

C Distance stair base hole

F Frame height

G Height of closed system

I Exposed frame width

R Maximum stair opening space

P Tread 8 cm



w Width of ceiling hole

l Depth of ceiling opening

F = 140

G = 400

I = 24

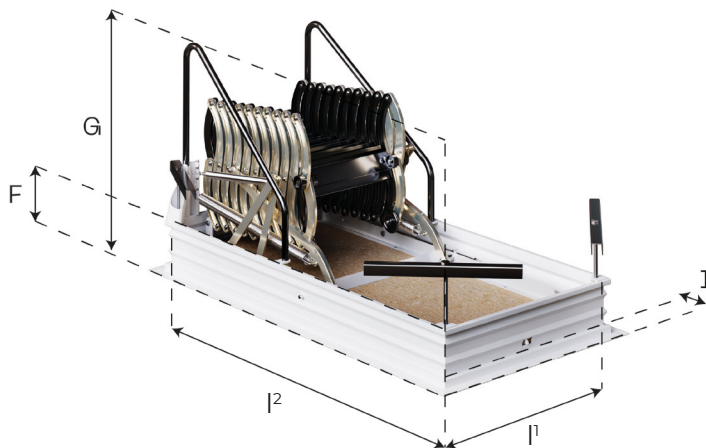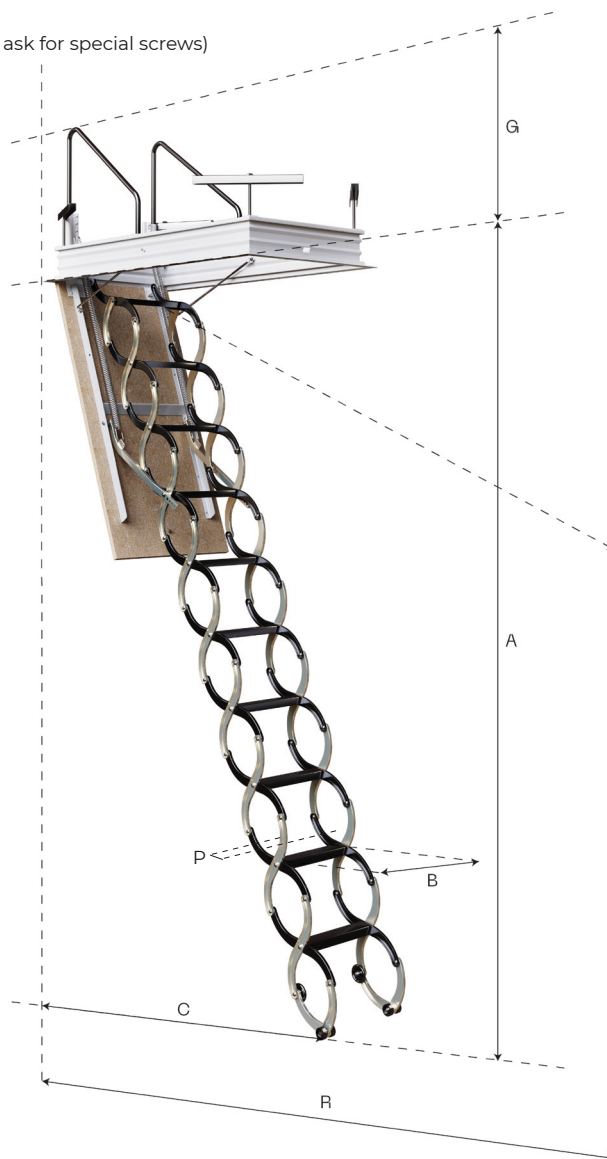

RETRACTABLE CEILING LADDER AND ACCESSORIES

"Supra" is packaged and sold with 10 steps included. One can easily adjust the length of the ladder, according to the table below, by adding or removing steps with great ease. These, in fact, are fixed together by metric screws and self-locking nuts.

NUMBER OF STEPS (RUNGS)	HEIGHT FROM FLOOR TO CEILING (cm)
8	220 - 244
9	245 - 275
10	275 - 304
11	305 - 320

Maximum height of the ladder in relation to the hole

MODEL 4 PIECES / 3 PIECES				
Hole (cm)	Number of pieces	Maximum height of the ladder	Number of pieces	Maximum height of the ladder
70 x 90	4	300		
70 x 100	4	330		
70 x 110	4	330		
70 x 120	3	300	4	350
70 x 130	3	300	4	380
70 x 140	3	350	4	400
70 x 150	3	360	4	450
70 x 160	3	380	4	450


MODEL 3 PIECES / 4 PIECES				
Hole (cm)	Number of pieces	Maximum height of the ladder	Number of pieces	Maximum height of the ladder
55 x 90	4	300		
55 x 100	4	330		
55 x 110	4	330		
55 x 120	3	300	4	350
55 x 130	3	300	4	380
55 x 140	3	350	4	400
55 x 150	3	360	4	450
55 x 160	3	380	4	450

RETRACTABLE CEILING LADDER AND ACCESSORIES

3. USE

Typically used inside houses and/or outbuildings and/or technical rooms to reach floors without the encumbrance of a fixed ladder. The ergonomic shape of the steps acts as a handrail during the correct use of the ladder both up and down.

1. Unscrew the ladder.
2. Remove the bag containing the components and the assembly instructions from the packaging.
3. Read the instructions and check that all components are present.
4. Install the 4 anchor bolts.
- 5-6. Two people lift the ladder up to the mezzanine and place it on the opening made earlier.
7. Install the ladder in the loft in the opening.
8. Position the ladder in the mezzanine.
9. A third person, already in the mezzanine, fixes the frame with 4 supports.

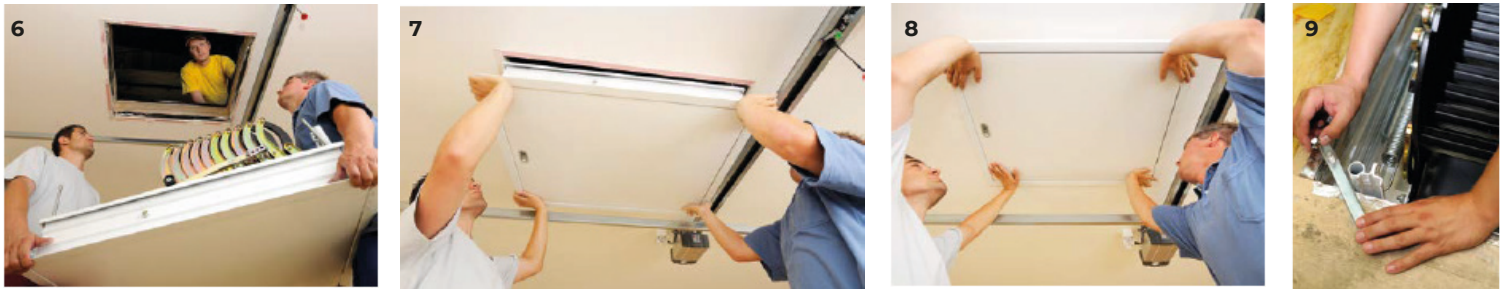

10. Install the loft ladder firmly in the ceiling.
11. Check that the loft ladder and the flap are securely fastened in place.
12. Open the flap of the ladder via the pole.
13. Allow the ladder to descend with the operating pole.
14. Install the safety rail (handle) for the loft ladder.
15. Stow the loft ladder away using the pole.
16. The other end of the post has a plastic and flap closure piece.



RETRACTABLE CEILING LADDER AND ACCESSORIES

4. FIRE RESISTANCE FEATURES

Fire classification approval was issued based on these standards and technical documents:

- CSN 73 0810 Fire protection of buildings - General requirements
- CSN EN 1634-1+A1 Fire resistance and smoke control tests for door and roller shutter assemblies, opening windows and building hardware elements Part 1: Fire resistance test for windows and door frames and opening windows

TEST METHOD	PARAMETERS	RESULT
CSN EN 1363-1 taking into account CSN EN 1634-1+A1	Fire scenario	Standard temperature
	Side of fire exposure	From the visible side, that is, from the bottom of the side with the hinges
	Number of faces exposed to fire	1
	Load applied	0
	Construction support	Concrete panel 3500 × 2000 × 150 mm with opening for mounting the test element.
	INTEGRITY	
	switching on the cotton swab	71 minutes, no subsidence
	cracks or openings greater than the indicated value ¹⁾	71 minutes, no subsidence
	sustained flare-up on the unexposed face	71 minutes, no subsidence
	INSULATION I₁	
	Average temperature	60 minutes
	Maximum temperature	63 minutes
	Maximum temperature - support process	62 minutes
	Maximum temperature on the door frame 180 °C	not measured ²⁾
	INSULATION I₂	
	Average temperature	60 minutes
	Maximum temperature	63 minutes
	Maximum temperature on the door frame 360 °C	not measured ²⁾
	RADIATION (W) (not measured) ³⁾	
	Heat flow 15 kW.m ⁻²	71 minutes, not reached

¹⁾ Integrity was not measured with distance gauges because of the horizontal laying of the specimen-it was assessed visually.


²⁾ Temperatures on the frame were not measured (see CSN EN 1634-1+A1 Article 9.1.2.3).

³⁾ Measurement of irradiance of temperatures below 300 °C is not necessary because the irradiance of such surfaces is low (see CSN EN 1363-2 Article 8.1) - average temperatures did not exceed 300 °C on the unexposed side of the sample.

The irradiance criterion was not met during the duration of the test for any of the irradiance levels in CSN EN 1363-2, Article 8.4.

RETRACTABLE CEILING LADDER AND ACCESSORIES


Installation with ceiling thickness below the frame

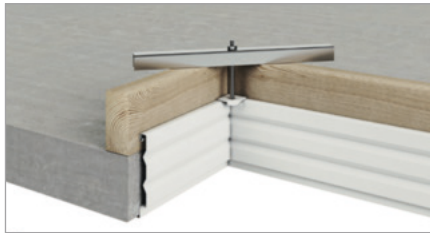


Installation with ceiling thickness greater than the frame



Apertura

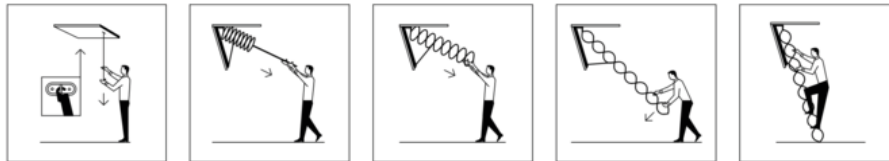

Chiusura

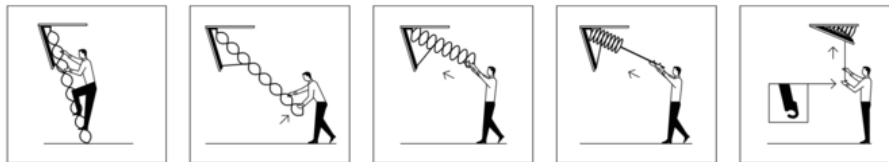

5. ACCESSORIES



The step is used to increase the floor-to-ceiling height (allows height increase up to 250 mm). It is recommended to add no more than one.

The landing handle facilitates access to the floor and/or the start of the descent and springs can be used instead of mounted ones.

Item	Description	Measure (mm)	Weight	Pkg. / Pallet
SCA01-590/10	Step for 500 ladder (8 cm tread)	300	1,30 kg/pc.	1 pc. / - pc.
SCA01-590/11	Step for staircase 600 (8 cm tread)	420	2,00 kg/pc.	1 pc. / - pc.
SCA01-590/9	Step for staircase 700 (8 cm tread)	400	2,00 kg/pc.	1 pc. / - pc.
SCA01-590/P	Landing handle (Pair)	L 550 X A 20 X P 450	0,75 kg/pc.	1 pc. / - pc.
SCA01-590/B	Poles for Retractable Ladders	L 40 X A 20 X P 680	0,63 kg/pc.	1 pc. / - pc.
SCA01-590/S	Lock for Retractable Ladder	L 80 X A 80 X P 80	0,25 kg/pc.	1 pc. / - pc.
SCA01-590/M	Springs for Retractable Ladder (Pair)	L 70 X A 40 X P 530	1,1 kg/pc.	1 pc. / - pc.

MATERIAL

Made of tropicalized powder-coated steel.

RETRACTABLE CEILING LADDER AND ACCESSORIES

6. TECHNICAL SPECIFICATION

Item	Description	Unit	Price
Dak.I.SCA01.590/x	The "Supra" retractable staircase is manufactured with bolted treads for easy replacement or addition. It is available in a wide range of sizes (see table) for a maximum floor-to-ceiling height of 3,200 mm (maximum height achievable with optional step(s) and a tread width of 80 mm). The "Supra" retractable ladder is equipped with a fixing system that allows it to be positioned even on uneven slabs. It is also equipped with a lock and an "open-close" stick. Individually shrink-wrapped. The ladder pack is made of powder-coated tropicalized steel while the frame is made of white enamelled galvanised steel. Usually used inside houses and/or utility rooms to reach floors without the encumbrance of a fixed ladder. The ergonomic shape of the steps acts as a handrail during the correct use of the ladder both up and down.		
Dak.I.SCA01.590/0	Dimensions 500 x 700 mm.....	pc.	-
Dak.I.SCA01.590/1	Dimensions 500 x 800 mm.....	pc.	-
Dak.I.SCA01.590/8	Dimensions 500 x 900 mm.....	pc.	-
Dak.I.SCA01.590/2	Dimensions 500 x 1.000 mm.....	pc.	-
Dak.I.SCA01.590/1S	Dimensions 600 x 700 mm.....	pc.	-
Dak.I.SCA01.590/3S	Dimensions 600 x 800 mm.....	pc.	-
Dak.I.SCA01.590/4S	Dimensions 600 x 900 mm.....	pc.	-
Dak.I.SCA01.590/5S	Dimensions 600 x 1.000 mm.....	pc.	-
Dak.I.SCA01.590/6S	Dimensions 600 x 1.100 mm.....	pc.	-
Dak.I.SCA01.590/7S	Dimensions 600 x 1.200 mm.....	pc.	-
Dak.I.SCA01.590/2S	Dimensions 700 x 700 mm.....	pc.	-
Dak.I.SCA01.590/3	Dimensions 700 x 800 mm.....	pc.	-
Dak.I.SCA01.590/4	Dimensions 700 x 900 mm.....	pc.	-
Dak.I.SCA01.590/5	Dimensions 700 x 1.000 mm.....	pc.	-
Dak.I.SCA01.590/6	Dimensions 700 x 1.100 mm.....	pc.	-
Dak.I.SCA01.590/7	Dimensions 700 x 1.200 mm.....	pc.	-
Dak.I.SCA01.590/X	pc.	-

Item	Description	Unit	Price
Dak.I.SCA01.590/x	Additional step for "Supra" stairs, both floor and wall mounted, available in widths 300, 320 and 400 mm. Landing handle to facilitate climbing. Stairs, springs and lock. Made of tropicalized, powder-coated steel. Used to increase the floor-to-ceiling height (allows height increase up to 250 mm). It is advisable to add no more than one. The landing handle facilitates access to the ceiling and/or the start of the descent. Springs to replace mounted ones.		
Dak.I.SCA01.590/10	Dimensions 300 mm.....	pc.	-
Dak.I.SCA01.590/11	Dimensions 320 mm.....	pc.	-
Dak.I.SCA01.590/9	Dimensions 400 mm.....	pc.	-
Dak.I.SCA01.590/P	pc.	-
Dak.I.SCA01.590/B	pc.	-
Dak.I.SCA01.590/S	pc.	-
Dak.I.SCA01.590/M	pc.	-