

FOLDING WOOD STAIR



INDEX

1. Code Registry
2. Description
3. Use
4. Technical Specification

1. CODE REGISTRY

Code	Description	(mm)	Weight	Pkg. / Pallet
SCA04-800	3 pieces of wood folding stair	700 x 1.200 x 2.800	30 kg/pc.	1 pc. / 16 pcs.
SCA04-790	3 pieces of wood folding stair	600 x 1.200 x 2.800	25 kg/pc.	1 pc. / 16 pcs.

MATERIALE

Made of solid wood treated.

2. DESCRIPTION

Retractable pine ladder, consisting of three hinged elements and frame with multilayer hatch with double sealing gasket to ensure excellent tightness (4th class according to EN 12207).

The white-colored door consists of a double layer (sandwich type) with a total thickness of 4.6 cm to form an optimal barrier by reducing heat loss between room and attic.

The handle ensures greater comfort and safety in using the ladder.

Individually packaged , provided with a stick.

Available in attic opening dimensions 600 x 1.200 x 2.800 and 700 x 1.200 x 2.800 mm.

3. USE


Usually used in homes to reach attics without the encumbrance of a fixed ladder.

The ladder can be folded up and disappear to make the ceiling indicated in the presence of a confined space.

Step dimensions:

length 33 cm
width 8 cm
thickness 2 cm

FOLDING WOOD STAIR

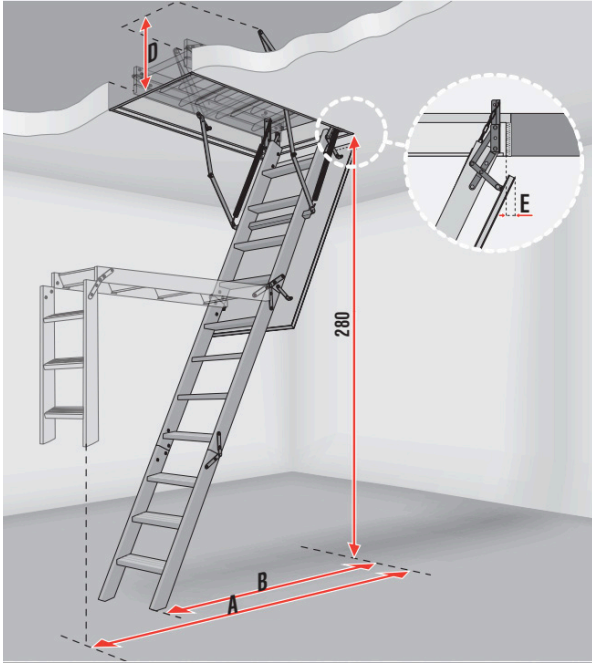

Hatch	Box	Staircase	Treads
Insulated double-sided white 3,6 cm thick sandwich-type trapdoor	Pine wood interior	Staircase in three sections	treads connected to the ropes by dovetail joints
Equipped with a lock	Steel perimeter with spring retainer	Made of pine wood	fitted with special non-slip grooves
Reduces heat loss	Equipped with gasket	Metal handrail increases the comfort and safety of using the loft ladder	
Equipped with a lock with excellent waterproof seal, guaranteed by a lock located in the hatch that presses the hatch against the seals when closing.			

Dimensions (mm)	Height of the room A (cm)	Folding space B (cm)	Height of the folded stairs D (cm)	Re-entry of the hatch E (cm)
600 x 1.200	151	110	29	4
700 x 1.200	151	110	29	4

4. TECHNICAL SPECIFICATION

Specification	Description	Unity	Price
Dak.I.SCA04.xxx	Supply and installation of retractable pine ladder, composed of three hinged elements and a frame with a multilayered trapdoor with a double seal to guarantee an excellent seal (4th class according to EN 12207). The door, white in color, is double layer (sandwich type) for a total thickness of 4.6 cm in order to create an optimal thermal barrier between the room and the attic. The handle ensures greater comfort and safety when using the ladder. Individually packed. Available in the size of the entrance to the attic 700 x 1.200 x 2.800 or 600 x 1.200 x 2.800 mm. Made of solid wood treated. Usually used in homes to reach attics without the encumbrance of a fixed ladder. The ladder can be folded up and disappear to make the ceiling indicated in the presence of a confined space.		
Dak.I.SCA04.800	Dimension 700 x 1.200 x 2.800 mm.....	pc.	-
Dak.I.SCA04.790	Dimension 600 x 1.200 x 2.800 mm.....	pc.	-