


5 HOLES CONNECTING ANGLE

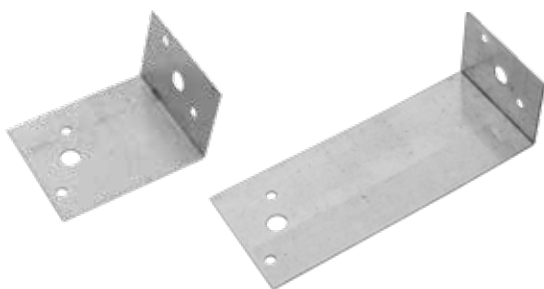

INDEX

1. Registry code
2. Description
3. Use
4. Features
5. Technical specification

1. REGISTRY CODE

Code	Description	Measures (mm)	Weight (kg/pz.)	Color	Pkg. / Pallet
GAN01-5114	5 holes connecting angle	60 x 35	0,025	Gray	100 pz. / 36.800 pz.
GAN01-5115	5 holes connecting angle	120 x 35	0,036	Gray	100 pz. / 34.400 pz.

MATERIAL DX51 laminated sheet metal

2. DESCRIPTION

This product is made of galvanized steel with a thickness of 1 mm. It is designed for use in the construction of clad gypsum counterwalls, offering wall spacing options of 60 or 120 mm. The bracket attaches to metal profiles using metal structure screws, ensuring a secure and stable installation.

3. USE

The product is ideal for the installation of coated gypsum counterwall in residential, commercial and public buildings. Due to its strength and the guaranteed resistance of galvanized steel, it is particularly suitable for environments that require reliable and durable structures.

4. FEATURES

Material	DX51 laminated sheet meta	
Thickness	1,00 mm	EN 10143
Wall spacing	60 o 120 x 35 mm	
Box	100 pcs.	

5. TECHNICAL SPECIFICATION

Item	Description	Unit	Price
Dak.B.GAN01.511X	Supply and installation of 5-hole galvanized steel bracket with a thickness of 1 mm. Packaged in boxes of 100 pcs. Made of galvanized steel sheet. Used for installation of coated gypsum counterwall in residential, commercial and public buildings.	Pkg.	-