UNIVERSAL SPACER FOR PROFILE

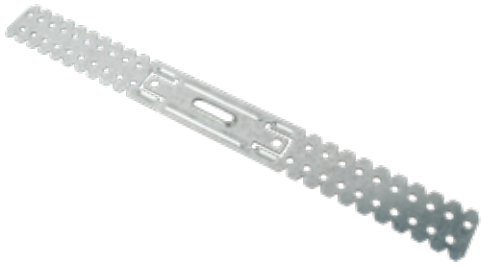

INDEX

1. Registry code

2. Description

3. Use

4. Features

5. Technical specification

1. REGISTRY CODE

Code	Description	Measures (mm)	Weight (kg/pz.)	Color	Pkg. / Pallet
GAN01-5116/12	Universal spacer for profile 50 x 120 mm	50 x 120	0,036	Gray	100 pcs. / 10.500 pcs.
GAN01-5116/20	Universal spacer for profile 50 x 200 mm	50 x 200	0,036	Gray	100 pcs. / 6.600 pcs.
GAN01-5117/12	Universal spacer for profile 60 x 120 mm	60 x 120	0,036	Gray	100 pcs. / 10.500 pcs.
GAN01-5117/20	Universal spacer for profile 60 x 120 mm	60 x 200	0,036	Gray	100 pcs. / 6.600 pcs.

MATERIAL DX51 laminated sheet metal

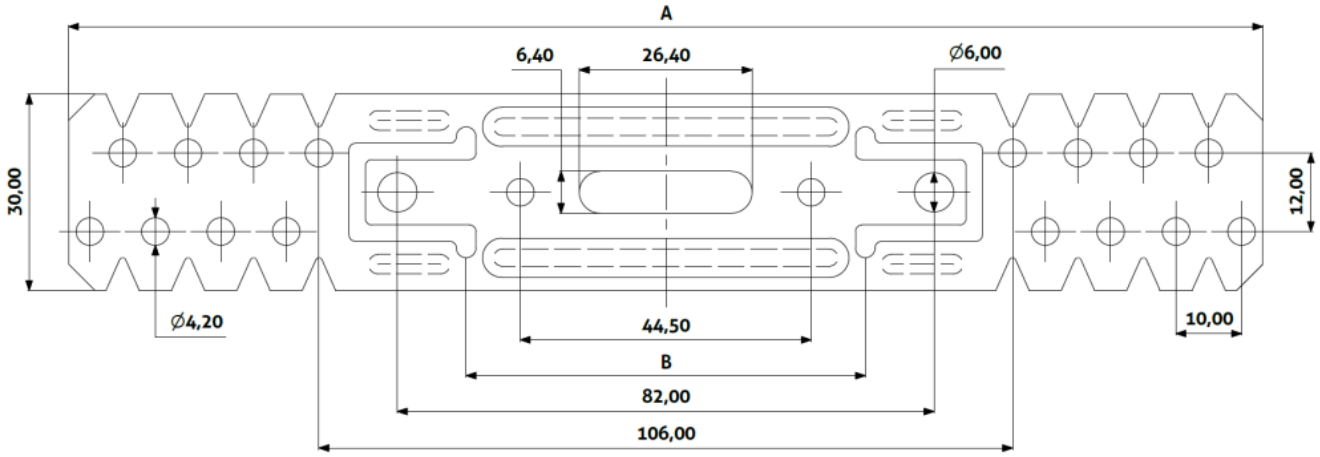

2. DESCRIPTION

This product is made of galvanized steel with a thickness of 1 mm. It is designed for use in the construction of clad gypsum counterwalls, offering wall spacing options of 60 or 120 mm. The bracket attaches to metal profiles using metal structure screws, ensuring a secure and stable installation.

3. USE

This product is used for mounting metal profiles in vertical, horizontal or inclined constructions of buildings. It is particularly suitable for the installation of plasterboard ceilings, allowing secure and adjustable attachment of profiles. The brackets are ideal for a wide range of applications in commercial, industrial, and residential buildings, where a reliable and versatile solution for handling complex interior and interior structures is required.

This data sheet supersedes and replaces all previous ones. The information contained herein is accurate to our present knowledge.
Dakota Group S.a.S. assumes no responsibility or liability with respect to the information given. Dakota Group S.a.S. reserves the right to change speci cations and models without prior notice. Dakota Group S.a.S. - Via Don Cesare Scala, 55 - Brentino Belluno (VR) - Italy - www.dakota.eu - info@dakota.eu

UNIVERSAL SPACER FOR PROFILE

4. FEATURES

Materiale	DX51 laminated sheet metal	
Rivestimento	Zinc - min Z100	EN 10327
Spessore	1,00 mm	EN 10143
Larghezza	50 o 60 mm	
Distanziatura dalla parete	3 - 120 mm 3 - 200 mm	
Carico ammissibile	0,50 kN	
Reazione al fuoco	A1	EN 14195
Durabilità	B Class	
Scatola	100 pcs.	

5. TECHNICAL SPECIFICATION

Item	Description	Unit	Price
Dak.B.GAN01.5116/X **Dak.B.GAN01.5117/X**	Supply and installation of plasterboard ceiling brackets for profile 50. Width 50 or 60 mm, length 120 or 200. Packaged in boxes of 100 pcs. Made of galvanized steel sheet. Used for mounting metal profiles in vertical, horizontal or inclined constructions of buildings.	pkg.	-

This data sheet supersedes and replaces all previous ones. The information contained herein is accurate to our present knowledge.
Dakota Group S.a.S. assumes no responsibility or liability with respect to the information given. Dakota Group S.a.S. reserves the right to change speci cations and models without prior notice. Dakota Group S.a.S. - Via Don Cesare Scala, 55 - Brentino Belluno (VR) - Italy - www.dakota.eu - info@dakota.eu