


TWO COLORED SHADING MESH

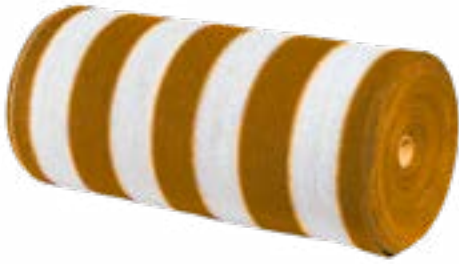

INDEX

1. Code registry
2. Use
3. Technical specification

1. CODE REGISTRY

Code	Description	Weight	Measure (m)	Pkg.	Pallet
RET05-199	Two colored shading mesh	75 gr/m ²	2,00 x 100	200 m ²	2.400 m ²

MATERIAL

Made of PE-HD (high-density polyethylene), flat knitted-fabric, it is particularly resistant to mechanical stress, tear and ageing due to exposure to the atmospheric agents.

Description	Standard of reference		Data
Resistenza alla trazione	ISO 13934		kg 280
Resistenza alla trazione trama	ISO 13934		kg 180
Spessore	-		0,03 mm
UV stability	ASTM G154		400 kLy
Wind barrier	Empty area	Filled area	Density of coverage
	24%	76%	

2. UTILIZZO

Used to protect property and people from exposure to direct sunlight and to delimit private areas.

3. VOCI DI CAPITOLATO

Voce	Descrizione	Unità	Prezzo
Dak.E.RET05.199	Supply and installation of Woven slotted mesh (shading type), available in white/orange colour - one-size. Packed in cellophane rolls. Made of PE-HD (high-density polyethylene), with a flat mesh (blackout type). Proven to be particularly resistant to mechanical stress, tearing and aging from exposure to weather. Used to protect things and people from exposure to direct sunlight and as a boundary breaker to demarcate private areas. Dimensioni 2,00 x 100 m.....	m ²	-