



OUTDOOR CROSS SHAPED SPACERS



TER04-4315/4



TER04-4320/4



INDEX

1. Code registry
2. Description
3. Use
4. Technical specification

1. CODE REGISTRY

Code	Description	Dimension (mm)	Weight	Pkg / Pallet	M.U.
TER04-4315/4	Cross Outdoor Spacer - 100 pz	h. 15 - thick. 4	-	6 cf / 216 cf	cf.
TER04-4320/4	Stackable Cross Outdoor Spacer - 100 pz	h. 20 - thick. 4	-	6 cf / 216 cf	cf.

MATERIAL Made of PP (Polypropylene)

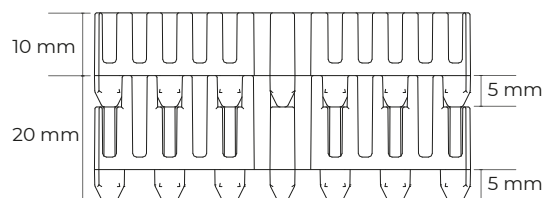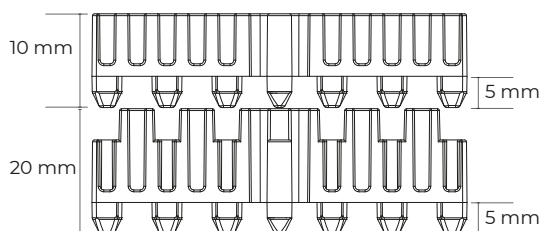

2. DESCRIPTION

Outdoor Cross Shaped Spacers for laying outdoor paving or setts of different thicknesses on waterproof membranes, stabilised ground, concrete surfaces.

Available in 2 different heights of 15 and 20mm with a joint thickness of 5 mm.

The 20mm height spacer, thanks the special shape of its bottom, can be stacked on the 15 or 20mm spacer, in order to achieve all the requested heights.

The 15mm one acts both as a single spacer and as an extension of 10mm for the h. 20mm model.

All these models can be broken in order to obtain a T-shaped or linear spacer.

3. USE

Perfect spacer for laying outdoor paving or setts of different thicknesses on waterproof membranes, stabilised ground, concrete surfaces with a 4mm joint line.

4. TECHNICAL SPECIFICATION

Specification	Description	Unity	Price
Dak.D.TER04.43xx/4	Supply and installation of Outdoor Cross Shaped Spacers for laying outdoor paving or setts of different thicknesses on waterproof membranes, stabilised ground, concrete surfaces. Available in 2 different heights of 15 and 20mm with a joint thickness of 4mm. Made of PP (polypropilene)	pc.	-