


HERCULES - ADJUSTABLE SUPPORT PAVING- SELF-LEVELING HEAD

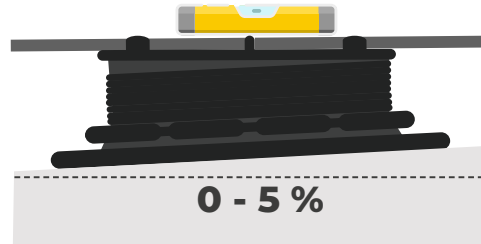


INDEX

1. Code registry
2. Description
3. Use
4. Carrying capacity
5. Fields of use
6. Technical specification


1. CODE REGISTRY

| Code | Description | Measure (mm) | Weight (kg) | Pkg / Pallet |
|------------------|-------------------------------------------------|-----------------|-------------|--------------------|
| TER09-1183/4L25 | Hercules Paving - Self-Leveling Head 4 mm joint | from 25 to 37 | 0,223 | 30 pcs. / 720 pcs. |
| TER09-1183/4L37 | Hercules Paving - Self-Leveling Head 4 mm joint | from 37 to 60 | 0,284 | 30 pcs. / 480 pcs. |
| TER09-1183/4L60 | Hercules Paving - Self-Leveling Head 4 mm joint | from 60 to 94 | 0,408 | 25 pcs. / 300 pcs. |
| TER09-1183/4L94 | Hercules Paving - Self-Leveling Head 4 mm joint | from 94 to 150 | 0,543 | 20 pcs. / 160 pcs. |
| TER09-1183/4L150 | Hercules Paving - Self-Leveling Head 4 mm joint | from 150 to 270 | 0,736 | 15 pcs. / 120 pz. |
| TER09-1183/P120 | Extension for Hercules 150 - 270 | h. 120 | 0,186 | 1.200 pcs. |
| TER09-1183CHI | Adjustment key for Hercules | - | 0,200 | 12 pcs. / - |


MATERIAL Made of PP (polypropylene).



TER09-1183/4L25

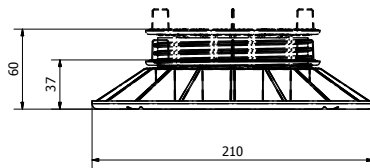


TER09-1183/4L37

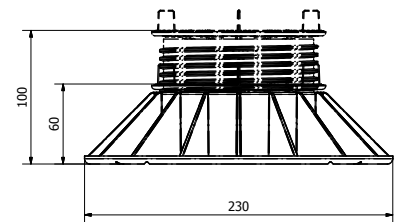


TER09-1183/4L60



HERCULES - ADJUSTABLE SUPPORT PAVING- SELF-LEVELING HEAD

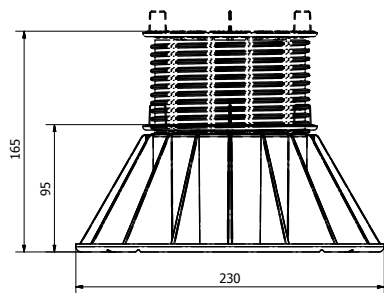


TER09-1183/4L94

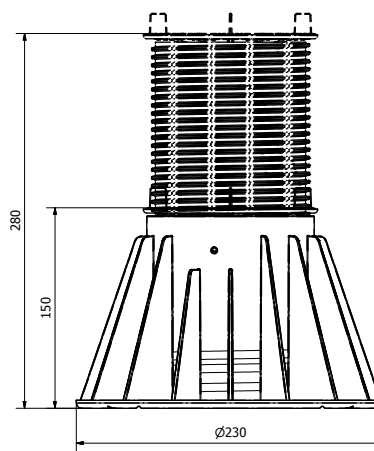

TER09-1183/4L150



BACK BASE

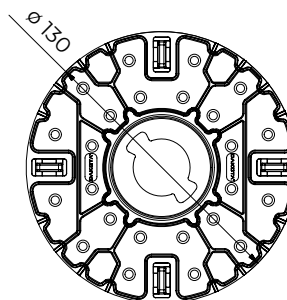

SELF-LEVELING HEAD

2. DESCRIPTION

Hercules adjustable support for outdoor flooring, with adjustable height from min. 25 to max. 390 mm (depending on the model used).

Each pack contains the complete disassembled support with base, screw and self-levelling head (till 5%) for paving with 4 removable wings for 4 mm joints.

The head is equipped with integrated anti-noise rubber. Only the model from h. 150 to 270 mm can be extended by applying the specific extension h. 120 mm (TER09-1183 / P120). The finalization of the adjustment of the support takes place with the floor installed using the appropriate key.

3. USE

Used in external areas, terraces, pavements.

The use of polishing and sanding machines is not recommended.

4. CARRYING CAPACITY

- Minimum load capacity = 15 kN (totally extended)
- Maximum load capacity = 30 kN (completely not extended)

HERCULES - ADJUSTABLE SUPPORT PAVING- SELF-LEVELING HEAD

5. FIELDS OF USE

Waterproof membrane, hard insulating panels, squids and solid and compact pose plans



TER09-1183/P120



TER09-1183/CHI

6. TECHNICAL SPECIFICATION

| Code | Description | Unit | Price |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------|
| Dak.D.TER09.1183/4Lxxx | Hercules adjustable support for outdoor flooring Dimensions, with height from min. 25 to max. 390 mm (depending on the model used). Available in black color Made of polypropylene Used in external areas, terraces, pavements. | pc. | - |
| Dak.D.TER09.1183/4L25 | Hercules Paving - Self-Leveling Head 4 mm joint from 25 to 37 mm, base diameter 210 mm..... | pc. | - |
| Dak.D.TER09.1183/4L37 | Hercules Paving - Self-Leveling Head 4 mm joint from 37 a 60 mm, base diameter 210 mm..... | pc. | - |
| Dak.D.TER09.1183/4L60 | Hercules Paving - Self-Leveling Head 4 mm joint from 60 a 94 mm, base diameter 230 mm..... | pc. | - |
| Dak.D.TER09.1183/4L94 | Hercules Paving - Self-Leveling Head 4 mm joint from 94 a 150 mm, base diameter 230 mm..... | pc. | - |
| Dak.D.TER09.1183/4L150 | Hercules Paving - Self-Leveling Head 4 mm joint from 150 a 270, base diameter 230mm..... | pc. | - |
| Dak.D.TER09.1183/P120 | Extension h.120mm in polypropylene compatible with Hercules support 150, TER09-1183/1F150 | pc. | - |