
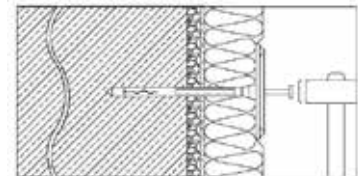
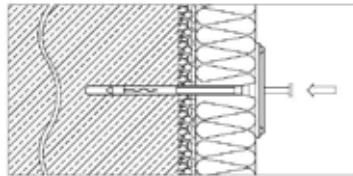


# ANCHOR SGR-PA V0 SELF-EXTINGUISHING (POLYAMIDE HAMMERING NAIL)

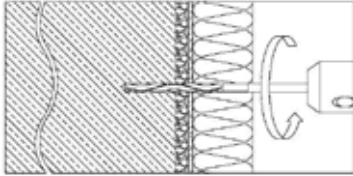


## INDEX

1. Code registry
2. Use
3. Technical specification

## 1. CODE REGISTRY

Code	Description	Dimensions (mm)	color	Pkg.	Pallet	Weight
TER11-3110AUT	Anchors SGR - hole $\varnothing$ 8	110 x $\varnothing$ 60	red	100 pcs	9.000 pcs	13 gr./pc.
TER11-3130AUT	Anchors SGR - hole $\varnothing$ 8	130 x $\varnothing$ 60	red	100 pcs	9.000 pcs	14 gr./pc.
TER11-3150AUT	Anchors SGR - hole $\varnothing$ 8	150 x $\varnothing$ 60	red	100 pcs	9.000 pcs	15 gr./pc.
TER11-3170AUT	Anchors SGR - hole $\varnothing$ 8	170 x $\varnothing$ 60	red	100 pcs	7.200 pcs	16 gr./pc.
TER11-3190AUT	Anchors SGR - hole $\varnothing$ 8	190 x $\varnothing$ 60	red	100 pcs	7.200 pcs	18 gr./pc.
TER11-3210AUT	Anchors SGR - hole $\varnothing$ 8	210 x $\varnothing$ 60	red	100 pcs	5.400 pcs	19 gr./pc.
TER11-3230AUT	Anchors SGR - hole $\varnothing$ 8	230 x $\varnothing$ 60	red	100 pcs	5.400 pcs	20 gr./pc.
TER11-3250AUT	Anchors SGR - hole $\varnothing$ 8	250 x $\varnothing$ 60	red	100 pcs	5.400 pcs	21 gr./pc.

**MATERIAL** Made of V0 plastic polymer.

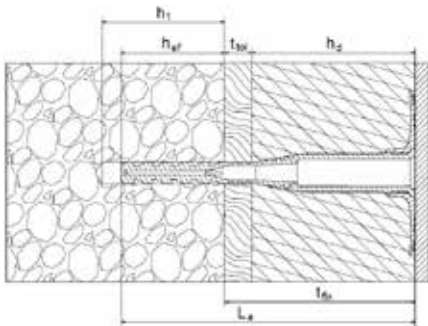

### Legend:

- $h_1$  = Hole Depth
- $h_{ef}$  = Anchoring Depth
- $t_{fix}$  = Fixable thickness ( $h_d + t_{toi}$ )
- $h_d$  = Insulating panel thickness
- $t_{toi}$  = Adhesive thickness or old plaster thickness
- $L_a$  = Anchor Length

$$\text{Anchor Length } L_a = t_{fix} + h_{ef} = h_d + t_{toi} + h_{ef}$$

The anchor length ( $L_a$ ) must be deep enough to ensure the minimum depth of anchorage to the wall ( $h_{ef}$ ) and must necessarily consider the presence of pre-existing layers of plaster and adhesive ( $t_{toi}$ ).

$$\text{Maximum thickness of the insulating panel } h_{dmax} = L_a - t_{toi} - h_{ef}$$

# ANCHOR SGR-PA V0 SELF-EXTINGUISHING (POLYAMIDE HAMMERING NAIL)

Declared Performances		
$N_{RK}$ Base material	KN	Technical specification
<b>Cat. A Concrete</b> - C 12/15 (EN 206-1) - C 16/20-C50/60 (EN 206-1)	0,4 0,5	pt. 5.4.2 ETAG 014
<b>Cat. B Solid masonry</b> (EN 771-1)	0,5	pt. 5.4.2 ETAG 014
<b>Cat. C Hollow or perforated masonry</b> (EN 771-1)	0,4	pt. 5.4.2 ETAG 014
<b>Cat. D LAC Lightweight aggregate concrete</b> (EN 1520)	0,5	pt. 5.4.2 ETAG 014
<b>Cat. E Autoclaved aerated concrete</b> (EN 771-4)	0,3	pt. 5.4.2 ETAG 014

$N_{RK}$  Load voltage resistance

## CERTIFICATIONS

Certified by EPD ISO 14025  
Certified according to ETAG014.  
ETA-16/0375


The base materials that have been certified are:  
cat. A (concrete)  
cat. B (solid masonry)  
cat. C (hollow or perforated masonry)  
cat. D (lightweight aggregate concrete)  
cat. E (autoclaved aerated concrete)



## 2. USE


The anchors must be placed where the adhesive has been applied. This solution will increase the adhesive cohesion strength generated by the anchor. The positioning of anchors can be done according to the following tessellation schemes.

### TESSELETON SCHEME "T" SHAPE

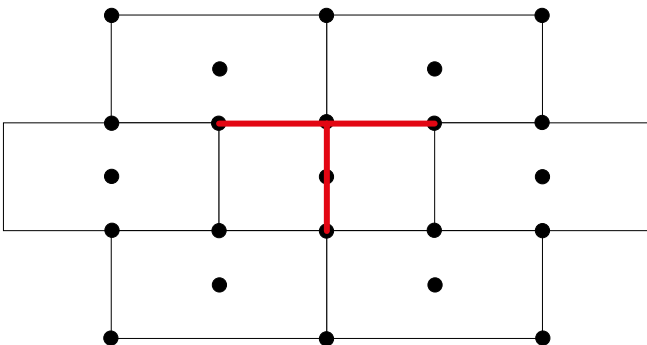

Polystyrene panels (EPS) with 6 anchors/sqm.  
In the tessellation scheme "T" there will be an anchor positioned on every panel intersection, plus one more anchor positioned on the center of each panel

### TESSELETON SCHEME "W" SHAPE

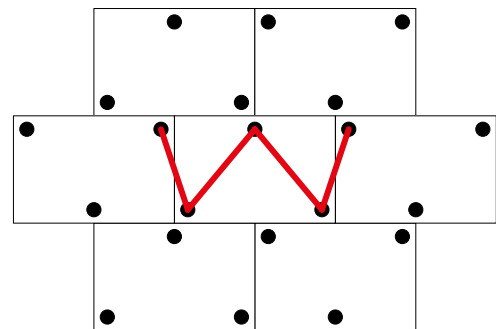

Mineral wool panels (MW) with 6 anchors/sqm.  
In the tessellation scheme "W" each insulating panel is fixed with 3 anchors.

# ANCHOR SGR-PA V0 SELF-EXTINGUISHING (POLYAMIDE HAMMERING NAIL)

## 3. TECHNICAL SPECIFICATION

Specification	Description	Unity	Price
<b>Dak.B.TER11.31xxAUT</b>	Supply and installation of 8 mm hole percussion mechanical fixing, with 60 mm head, improved grip and polyamide nail. Certified according to ETAG014. ETA-16/0375 The base materials that have been certified are: cat. A (concrete) cat. B (solid masonry) cat. C (hollow or perforated masonry) cat. D (lightweight aggregate concrete) cat. E (autoclaved aerated concrete) Made of V0 plastic polymer. Anchors positioning and number per sqm will be defined by the architect or by construction supervisor. Used for the mechanical anchoring of the insulating panels for almost all types of masonry, supporting the load and any "tear-off" stress. Self-extinguishing product		
<b>Dak.B.TER11.3110AUT</b>	Lenght 110 mm - Head 60 mm - ø 8.....	pc.	-
<b>Dak.B.TER11.3130AUT</b>	Lenght 130 mm - Head 60 mm - ø 8.....	pc.	-
<b>Dak.B.TER11.3150AUT</b>	Lenght 150 mm - Head 60 mm - ø 8.....	pc.	-
<b>Dak.B.TER11.3170AUT</b>	Lenght 170 mm - Head 60 mm - ø 8.....	pc.	-
<b>Dak.B.TER11.3190AUT</b>	Lenght 190 mm - Head 60 mm - ø 8.....	pc.	-
<b>Dak.B.TER11.3210AUT</b>	Lenght 210 mm - Head 60 mm - ø 8.....	pc.	-
<b>Dak.B.TER11.3230AUT</b>	Lenght 230 mm - Head 60 mm - ø 8.....	pc.	-
<b>Dak.B.TER11.3250AUT</b>	Lenght 250 mm - Head 60 mm - ø 8.....	pc.	-