


GREEN PLUS

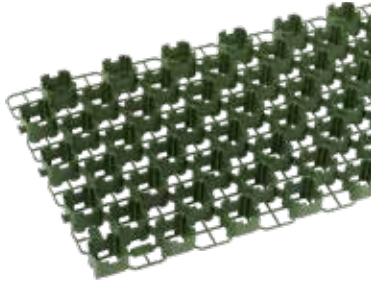

INDEX

1. Code Registry
2. Description
3. Use
4. Use - installation
3. Technical Specification

1. CODE REGISTRY

Code	Description	Dimension (mm)	Weight	Pkg. / Pallet
GAR01-0001/5	Green Plus	h. 50 - 400 x 400	0,84 kg/pcs.	1 pc. / 264 pcs.
GAR01-0002/4	Green Plus 2.4	h. 40 - 800 x 400	1,15 kg/pcs.	1 pc. / 156 pcs.
GAR01-0002/5	Green Plus 2.5	h. 50 - 800 x 400	1,20 kg/pcs.	1 pc. / 132 pcs.
GAR01-0006	White Cap - 100 pcs.	-	2,00 kg/box	1 box / - box



MATERIAL Made of high-density polyethylene (PE-HD).

2. DESCRIPTION

GREEN PLUS is a green grass grating tile for garden. It consists in a modular interlocking element of 400 x 400 x 50 mm. Available in 2.0 version: 800 x 400 x 40 mm (GREEN PLUS 2.4) and 800 x 400 x 50 mm (GREEN PLUS 2.5). It can be combined with 3 different types (for colour) cap signs. Loading capacity > 300 tons/smq.


3. USE

It is used for the reinforcement and strengthening of grass layers destined for parking cars and/or recreational activities and/or staging.

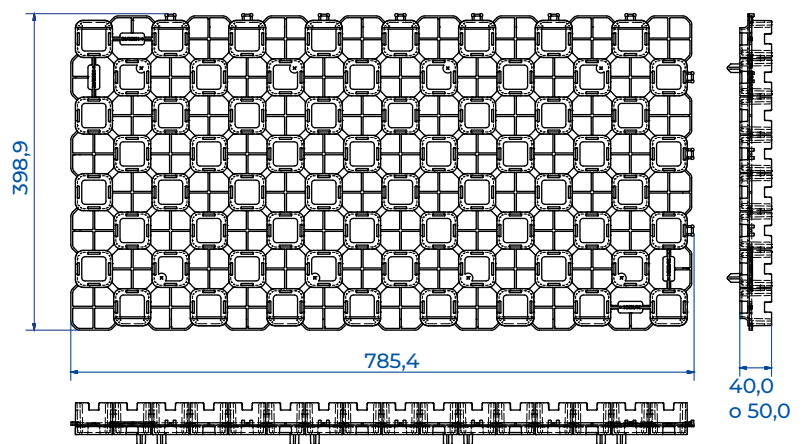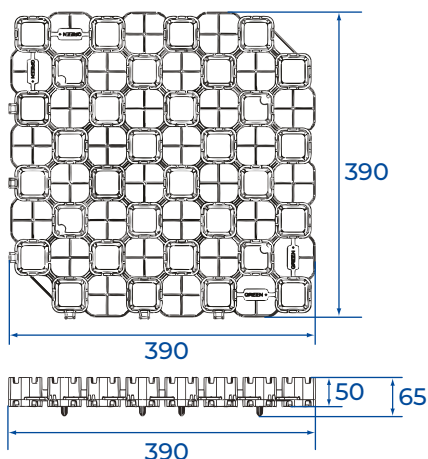

GREEN PLUS

4. USE - INSTALLATION

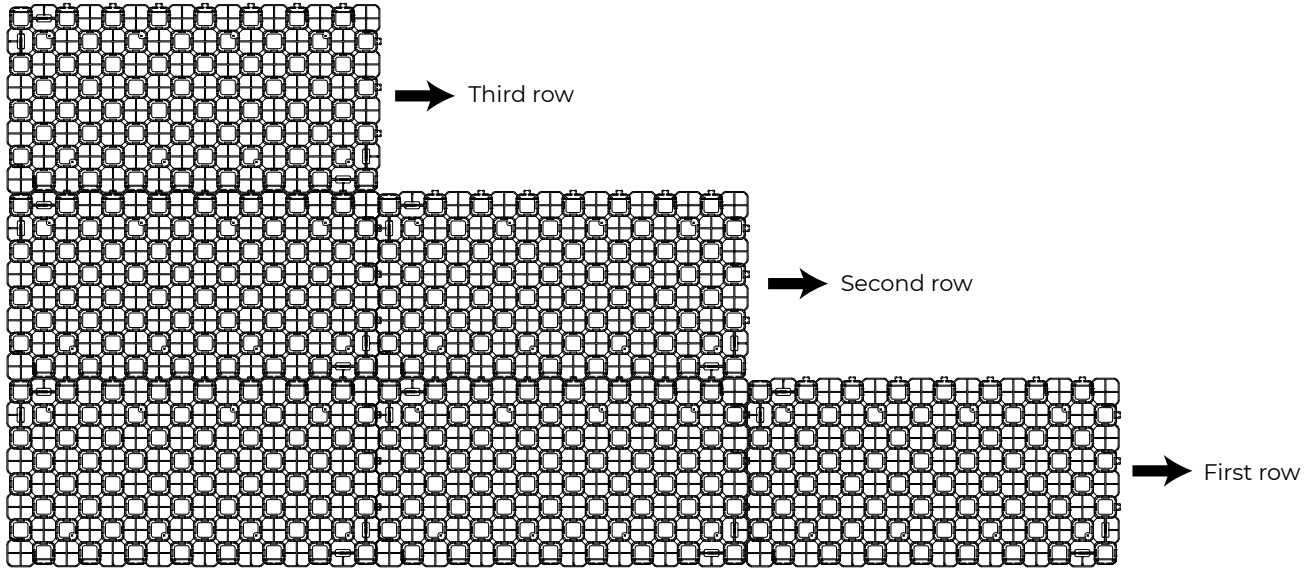

Lay a uniform base permeable to water, a base made of sand mixed with gravel is advised.
 Define the position of the pipes and lay the irrigation pipes in a row if needed.
 Lay the collector tube at a minimum distance of one every 40 cm and the branches that will be placed under the Green Plus, 2.4 and 2.5.(we recommend to use a micropore tube).
 Lay the Green Plus accurately as per the image above, being careful to connect the elements in the proper way.
 Place the substrate for the growth of the grass and sow the seeds.
 Water abundantly, both with the hose and with the irrigation system, to even the sand layer and make the Green Plus more stable.
 Do not drive over the Green Plus before the grass is grown since it acts as a further junction of the slabs.



5. TECHNICAL SPECIFICATION

Specification	Description	Unity	Price
Dak.O.GAR01.000x	Supply and installation of GREEN PLUS is a green grass grating tile for garden. It consists in a modular interlocking element of 400 x 400 x 50 mm. Available in 2.0 version: 800 x 400 x 40 mm (GREEN PLUS 2.4) and 800 x 400 x 50 mm (GREEN PLUS 2.5). It can be combined in three different (shades colour) cap signs. Loading capacity > 300 tons/m ² . Made of high-density polyethylene (PE-HD). It is used for the reinforcement and strengthening of grass layers destined for parking cars and/or recreational activities and/or staging.		
Dak.O.GAR01.0001/5	Dimension 400 x 400 mm.....	pc.	-
Dak.O.GAR01.0002/4	Dimension 800 x 400 - h. 40 mm.....	pc.	-
Dak.O.GAR01.0002/5	Dimension 800 x 400 - h. 50 mm.....	pc.	-
Dak.O.GAR01.0006	White Cap.....	box	-