









SINGLE TILE LEVELING ELEMENTS



INDEX


1. Registry codes
2. Description
3. Compatibility chart
4. Technical specification

1. DATI E DOCUMENTAZIONE


Code	Description	Picture	Measures (mm)	Bag	Pkg./Pallet (bags)	UM
TER04-4401DK	Linear screw 1 mm		1	100 pc	30 / 375	bag
TER04-44015DK	Linear screw 1,5 mm		1,5	100 pc	30 / 375	bag
TER04-4402DK	Linear screw 2 mm		2	100 pc	30 / 375	bag
TER04-44025DK	Linear screw 2,5 mm		2,5	100 pc	30 / 375	bag
TER04-4403DK	Linear screw 3 mm		3	100 pc	30 / 375	bag
TER04-4404DK	Linear screw 4 mm		4	100 pc	30 / 375	bag
TER04-4421DK	Cross screw 1 mm		1	100 pc	30 / 375	bag
TER04-4422DK	Cross screw 2 mm		2	100 pc	30 / 375	bag
TER04-4423DK	Cross screw 3 mm		3	100 pc	30 / 375	bag
TER04-4431DK	"T" screw 1 mm		1	100 pc	30 / 375	bag
TER04-4432DK	"T" screw 2 mm		2	100 pc	30 / 375	bag
TER04-4433DK	"T" screw 3 mm		3	100 pc	30 / 375	bag

SINGLE TILE LEVELING ELEMENTS


TER04-4401DK
TER04-44015DK
TER04-4402DK
TER04-4403DK

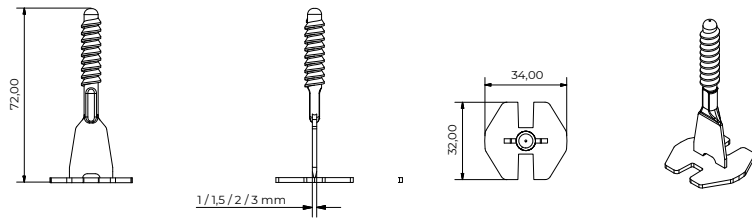

TER04-4421DK
TER04-4422DK
TER04-4423DK

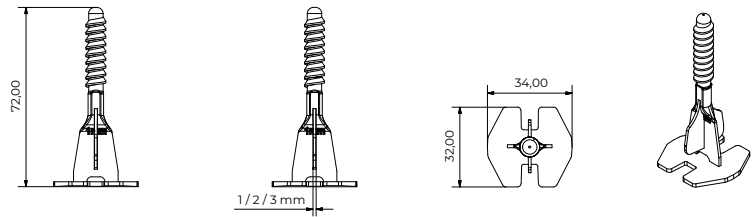

TER04-4431DK
TER04-4432DK
TER04-4433DK

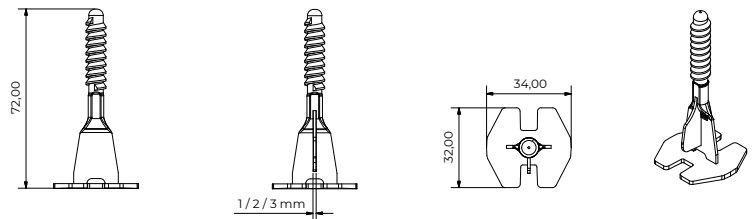




2. DESCRIPTION

Screw-on disposable elements, are used in conjunction with levelers (Quick Level, Simply Level, Lite Level) and make it possible, quickly and easily, to rectify any unevenness when laying between tile and tile, thus achieving coplanar and equidistant laying.

The working range is very wide with tiles from 3 to 24 mm (22 mm with scratch-resistant disc).
LINEAR Screw Spacers are available in sizes for 1, 1.5, 2, 3 mm joints, and Cross and T Screw Spacers in sizes for 1, 2, 3 mm joints.

3. TABELLA DI COMPATIBILITA'

Levelers	Linear screw	Cross screw	"T" screw
 QUICK LEVEL	✓	✗	✗
 SIMPLY LEVEL	✓	✓	✓
 LITE LEVEL	✓	✓	✓

SINGLE TILE LEVELING ELEMENTS

4. SPECIFICHE TECNICHE

Item	Description	Unit	Price
Dak.I.TER04.44xxDK	Supply and installation of disposable screw, linear, cross, and "T" spacers to be combined with Quick Level, Simply Level, and Lite Level levelers to quickly and easily achieve the rectification of any unevenness when laying between tile and tile, thus obtaining coplanar and equidistant laying. The linear spacer screws are available for 1, 1.5, 2, 2.5, 3, 4 mm joints, while the Cross and T screw spacers in sizes for 1, 2, 3 mm joints. Can be used as a leveling tool for tiles of various sizes and formats.		
Dak.I.TER04.440xDK	Linear screw element	bag	-
Dak.I.TER04.442xDK	Cross screw element.....	bag	-
Dak.I.TER04.443xDK	"T" screw element.....	bag	-