


# EAVES AND SILL WEDGE ELEMENT

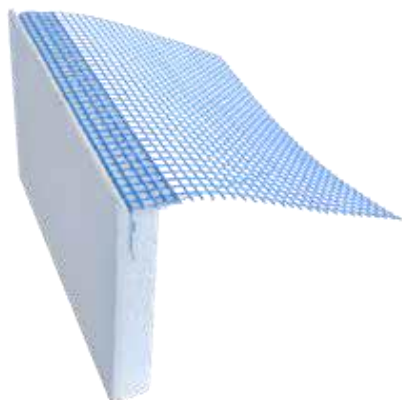

## INDEX

1. Data and Documentation
2. Description
3. Use
4. Specifications

## 1. DATA AND DOCUMENTATION


Code	Description	Weight (kg)	Dimensions (mm)	Pkg / Pallet
ZIN35-1778E/316	EPS Wall Element	2,4	300 x 1,600 Sp. 24	1 pc. / -
ZIN35-1778E/325	EPS Wall Element	4	300 x 2,500 Sp. 24	1 pc. / -
ZIN35-1778E/416	EPS Wall Element	3,2	400 x 1,600 Sp. 24	1 pc. / -
ZIN35-1778E/425	EPS Wall Element	5,4	400 x 2,500 Sp. 24	1 pc. / -
ZIN35-1778P/316	PU Shoulder Element	3,2	300 x 1,600 Sp. 24	1 pc. / -
ZIN35-1778P/325	PU Shoulder Element	5	300 x 2,500 Sp. 24	1 pc. / -
ZIN35-1778P/416	PU Shoulder Element	4,3	400 x 1,600 Sp. 24	1 pc. / -
ZIN35-1778P/425	PU Shoulder Element	6,8	400 x 2,500 Sp. 24	1 pc. / -
ZIN35-1778L/316	Mineral Wool Shoulder Element	3,6	300 x 1,600 Sp. 24	1 pc. / -
ZIN35-1778L/325	Mineral Wool Shoulder Element	5,7	300 x 2,500 Sp. 24	1 pc. / -
ZIN35-1778L/416	Mineral Wool Shoulder Element	4,8	400 x 1,600 Sp. 24	1 pc. / -
ZIN35-1778L/425	Mineral Wool Shoulder Element	7,6	400 x 2,500 Sp. 24	1 pc. / -
ZIN35-1768/180	Sill Support Wedge	1,8	180 x 2.700	1 pc. / -
ZIN35-1768/240	Sill Support Wedge	2,4	240 x 2.700	1 pc. / -

MATERIAL Sill support made from Expanded Polystyrene (EPS), Polyurethane (PU), Mineral Wool (LM). Sill support wedge made from expanded Polystyrene (EPS).


# EAVES AND SILL WEDGE ELEMENT

## 2. DESCRIPTION

The reveal element and the sill support wedge thermally insulate the soffit of doors, balcony doors and windows. The reveal element is available in EPS, polyurethane or mineral wool, and the sill support wedge in EPS only. They can be finished with all coatings for external insulation, thus respecting the aesthetics and colour scheme of the façade. This system consists of an insulation element coated with reinforced skim coat, corner profile and glass fibre mesh for connection to the façade cladding. It can be combined with the eaves profiles.




ZIN35-1778E  
Profile for EPS wallboard



ZIN35-1778P  
Profile for PU pallet



ZIN35-1778L  
Wool epaulette profile  
Mineral

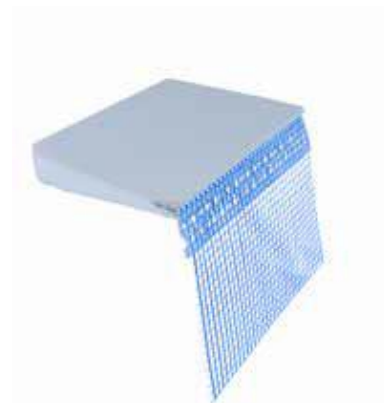

ZIN35-1768  
EPS sill wedge



# EAVES AND SILL WEDGE ELEMENT

## 3. USE

Used for thermal insulation of the soffits of doors, balcony doors and windows.

## 4. SPECIFICATION ITEMS

Entry	Description	Unit	Price
<b>Dak.B.ZIN35.1778x/xxx</b> <b>Dak.B.ZIN35.1768/xxx</b>	Supply and installation of sill plate and sill support wedge. Thermal insulation the soffit of doors, French windows and windows. The shimming element is available in EPS, polyurethane or mineral wool, while the supporting wedge sill in EPS only. They can be finished with all coatings for external insulation, thus respecting the aesthetics and colour scheme of the façade. This system consists of an insulating element coated with reinforced skim coat, profile angle and glass fibre mesh to the façade cladding. They can be combined with the eaves profiles.	pc.	-
<b>Dak.B.ZIN35.1778E/316</b>	300 x 1,600 Sp. 24.....	pc.	-
<b>Dak.B.ZIN35.1778E/325</b>	300 x 2,500 Sp. 24.....	pc.	-
<b>Dak.B.ZIN35.1778E/416</b>	400 x 1,600 Sp. 24.....	pc.	-
<b>Dak.B.ZIN35.1778E/425</b>	400 x 2,500 Sp. 24.....	pc.	-
<b>Dak.B.ZIN35.1778P/316</b>	300 x 1,600 Sp. 24.....	pc.	-
<b>Dak.B.ZIN35.1778P/325</b>	300 x 2,500 Sp. 24.....	pc.	-
<b>Dak.B.ZIN35.1778P/416</b>	400 x 1,600 Sp. 24.....	pc.	-
<b>Dak.B.ZIN35.1778P/425</b>	400 x 2,500 Sp. 24.....	pc.	-
<b>Dak.B.ZIN35.1778L/316</b>	300 x 1,600 Sp. 24.....	pc.	-
<b>Dak.B.ZIN35.1778L/325</b>	300 x 2,500 Sp. 24.....	pc.	-
<b>Dak.B.ZIN35.1778L/416</b>	400 x 1,600 Sp. 24.....	pc.	-
<b>Dak.B.ZIN35.1778L/425</b>	400 x 2,500 Sp. 24.....	pc.	-
<b>Dak.B.ZIN35.1768L/180</b>	180 x 2.700 .....	pc.	-
<b>Dak.B.ZIN35.1768L/240</b>	240 x 2.700 .....	pc.	-