

DK-FIX SUPPORT PLUS



INDEX

1. Data and Documentation
2. Description
3. Use
4. Specifications

1. DATA AND DOCUMENTATION

Code	Description	Measures mm	Quantity cf.	Weight (kg/cf.)	Pkg. / Pallet
ZIN35-1898/12	DK-FIX Support Plus	120 x 125 x 280	1	1,40	1 / 240 pcs.
ZIN35-1898/14	DK-FIX Support Plus	140 x 125 x 280	1	1,49	1 / 192 pcs.
ZIN35-1898/16	DK-FIX Support Plus	160 x 125 x 280	1	1,57	1 / 192 pcs.


MATERIAL PU (polyurethane) backing.

2. DESCRIPTION

Support for mounting external panels, made of CFC-free, rot-proof rigid polyurethane foam in black with three washers. DK-Fix Plus is available in three models that differ in maximum length and guarantee the same high load-bearing capacity. It also has pre-cuts (with 20 mm pitch) on the depth, making it extremely versatile and adaptable to various coat thicknesses.

3. USE

Supporting element for the external mounting of elements (such as hinges for window frames or anchorage points) ensuring the absence of thermal bridges.

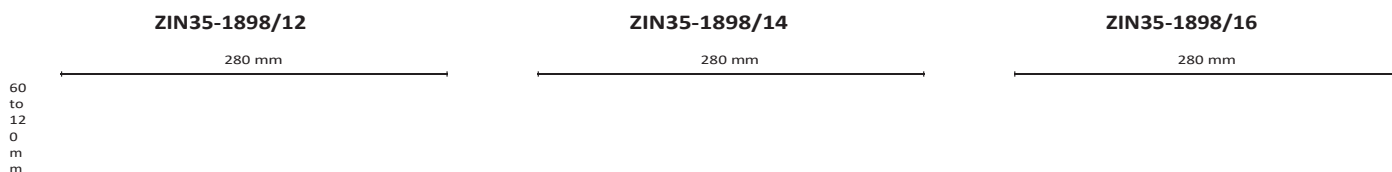

80 mm
100 mm
120 mm

80 mm
100 mm
120 mm
140 mm

0
m
m

80 mm
100 mm
120 mm
140 mm
160 mm

DK-FIX SUPPORT PLUS



DK-FIX SUPPORT PLUS

4. SPECIFICATION ITEMS

Entry	Description	Unit	Price
Dak.B.ZIN35.1898/nn	Supply and installation of support for the assembly of external panels, made of CFC-free, rot-proof rigid polyurethane foam in black with three washers. Made of PU (polyurethane). Support element for the external mounting of elements (such as hinges for window frames or anchorage points) ensuring the absence of thermal bridges.		
Dak.B.ZIN35.1898/12	120 x 125 x 280 mm.....	cf.	-
Dak.B.ZIN35.1898/14	120 x 125 x 280 mm.....	cf.	-
Dak.B.ZIN35.1898/16	120 x 125 x 280 mm.....	cf.	-



BUILDING

