


GREEN BUILDING SITE NETWORK

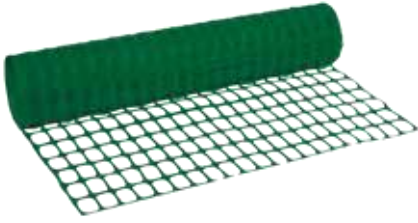

INDEX

1. Data and Documentation
2. Use
3. Specification item

1. DATA AND DOCUMENTATION

Code	Description	Weight	Measurements (m)	Pkg.	Pallet
RET04-120V	Green Yard Pro Network	160 g/m ²	1,20 x 50	60 m ²	2.940 m ²
RET04-150V	Green Yard Pro Network	160 g/m ²	1,50 x 50	75 m ²	3.780 m ²

MATERIAL Made of polyethylene, it is particularly resistant to mechanical stress, tearing and weathering.

2. USE

To enclose construction site areas, mark the presence of excavations and/or interruptions and delimit event areas.

3. SPECIFICATION ITEMS

Entry	Description	Unit	Price
Dak.E.RET04-1x0V	Supply and installation of extruded, single-strand, ovoid mesh, green (heavy line only), variable height from 1.20 to 1.50 m. Available in 160 g/m ² Professional weight in 50 m rolls. Packaged in cellophane. Made of polyethylene, it is particularly resistant to mechanical stress, tearing and weathering. To enclose construction site areas, mark the presence of excavations and/or interruptions and delimit event areas.		
Dak.E.RET04-120V	Dimensions 1.20 x 50 m.....	m ²	-
Dak.E.RET04-150V	Dimensions 1.50 x 50 m.....	m ²	-