

FIXALA - BLACK PHOSPHATED SELF-TAPPING SCREW NAIL TIP



INDEX


1. Data and Documentation
2. Use
3. Specifications

1. DATA AND DOCUMENTATION

Code	Description	Dimensions (mm)	Weight	Colour	Pkg. / Pallet
MIN01-5200	Fixala - Self Tapping Screw Black Nailhead with adapter	ø 3.5 x 25	1.36 kg/cf.	Black	1,000 pcs / 384,000 pcs.
MIN01-5200P	Fixala Plus - Self Tapping Screw Black Nailhead with adapter	ø 3.5 x 25	1.36 kg/cf.	Black	1,000 pcs / 384,000 pcs.
MIN01-5201	Fixala - Self Tapping Screw Black Nailhead with adapter	ø 3.5 x 35	1.67 kg/cf.	Black	1,000 pcs. / 288,000 pcs.
MIN01-5202	Fixala - Self Tapping Screw Black Nailhead with adapter	ø 3.5 x 45	1.16 kg/cf.	Black	500 pcs. / 576,000 pcs.

MATERIAL

Made of steel with phosphating treatment for protection.

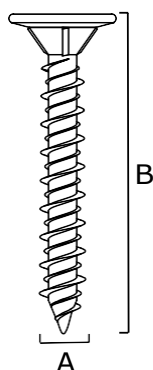

	A	B	
5200	ø 3,5	25,00	mm
5200P	ø 3,5	25,00	mm
5201	ø 3,5	35,00	mm
5202	ø 3,5	45,00	mm

2. USE

Used for plasterboard and sheet metal.

3. SPECIFICATION ITEMS

Entry	Description	Unit	Price
Dak.B.MIN01.520x	Supply and installation of Screw for fixing plasterboard sheets on metal structures, black phosphated, nail tip and countersunk head. Dimensions ø 3.5 x 25, ø 3.5 x 35, ø 3.5 x 45 mm. Fixala Plus guarantees even better performance. Packed in boxes of 1,000 pcs. and 500 pcs. Made of steel with a phosphating treatment for protection. Used for plasterboard and sheet metal.		
Dak.B.MIN01.5200	ø 3.5 x 25.....	cf.	-
Dak.B.MIN01.5200P	ø 3.5 x 25.....	cf.	-
Dak.B.MIN01.5201	ø 3.5 x 35.....	cf.	-
Dak.B.MIN01.5202	ø 3.5 x 45.....	cf.	-