


# ALUHYDRO WITHOUT FILLER

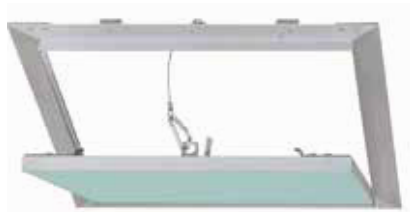


	a (nom)	b (nom)	a (serv)	b (serv)	c	
<b>6090G</b>	200	200	165	196	12,5	mm
<b>6091G</b>	300	300	265	296	12,5	mm
<b>6092G</b>	400	400	365	396	12,5	mm
<b>6093G</b>	450	450	415	446	12,5	mm
<b>6094G</b>	500	500	465	496	12,5	mm
<b>6095G</b>	600	600	565	596	12,5	mm
<b>6096G</b>	600	1.200	565	1.196	12,5	mm
<b>6097G</b>	800	800	765	796	12,5	mm

## INDEX

1. Data and Documentation
2. Use
3. Specification item

## 1. DATA AND DOCUMENTATION

Code	Description	Dimensions (mm)	Pkg.	Pallet	Weight
GAN01-6090G	AluHydro with Hydro Panel without filler	200 x 200	1 pc.	240 pcs.	900 g/pcs.
GAN01-6091G	AluHydro with Hydro Panel without filler	300 x 300	1 pc.	120 pcs.	1,600 g/pc.
GAN01-6092G	AluHydro with Hydro Panel without filler	400 x 400	1 pc.	100 pcs.	2,200 g/pc.
GAN01-6093G	AluHydro with Hydro Panel without filler	450 x 450	1 pc.	64 pcs.	2,800 g/pc.
GAN01-6094G	AluHydro with Hydro Panel without filler	500 x 500	1 pc.	32 pcs.	3,300 g/pc.
GAN01-6095G	AluHydro with Hydro Panel without filler	600 x 600	1 pc.	30 pcs.	4,700 g/pcs.
GAN01-6096G	AluHydro with Hydro Panel without filler	600 x 1.200	1 pc.	16 pcs.	9,100 g/pc.
GAN01-6097G	AluHydro with Hydro Panel without filler	800 x 800	1 pc.	20 pcs.	8,200 g/.pcs.



# BUILDING



# ALUHYDRO WITHOUT FILLER

## 2. USE

Used for ceilings, walls and counter walls.

## 3. SPECIFICATION ITEMS

Entry	Description	Unit	Price
<b>Dak.B.GAN01.609xG</b>	Supply and installation of inspection hatch with Hydro panel (suitable for wet rooms). Dust-proof rubber seal and fully manually releasable panel with cable and replaceable steel snap hook. Individually packaged in a box. Aluminium frame, water-resistant Hydro plasterboard panel with screwless visible fixing. Used for false ceilings, walls and counter walls. Delivered to the construction site in a cardboard box with a label showing the product characteristics.		
<b>Dak.B.GAN01.6090G</b>	Dimensions 200 x 200 mm - thickness 12.5 mm.....	pc.	-
<b>Dak.B.GAN01.6091G</b>	Dimensions 300 x 300 mm - thickness 12.5 mm.....	pc.	-
<b>Dak.B.GAN01.6092G</b>	Dimensions 400 x 400 mm - thickness 12.5 mm.....	pc.	-
<b>Dak.B.GAN01.6093G</b>	Dimensions 450 x 450 mm - thickness 12.5 mm.....	pc.	-
<b>Dak.B.GAN01.6094G</b>	Dimensions 500 x 500 mm - thickness 12.5 mm.....	pc.	-
<b>Dak.B.GAN01.6095G</b>	Dimensions 600 x 600 mm - thickness 12.5 mm.....	pc.	-
<b>Dak.B.GAN01.6096G</b>	Dimensions 600 x 1,200 mm - thickness 12.5 mm.....	pc.	-
<b>Dak.B.GAN01.6097G</b>	Dimensions 800 x 800 mm - thickness 12.5 mm.....	pc.	-

