

EXPANSION JOINT PLUS



INDEX

1. Data and Documentation
2. Use
3. Specifications

1. DATA AND DOCUMENTATION

Code	Description	Dimensions (mm)	Weight	Colour	Pkg. / Pallet
ZIN33-1669D	Expansion Joint Plus	h. 7 x 2.500	7.245 kg./cf.	White	62.5 m / 20 cf.

MATERIAL Made of PVC and glass fibre mesh.

Features	Units of Measurement	R131	
		Warp	Plot
Setting	for 10 cm	25 x 2	20,5
Standard Height	cm	110	
Roll length	m	50	
Thickness Treated Fabric	mm	0,52	
Raw Fabric Weight	g/m2	131	
Thickness Treated Fabric	min g/m2	160 ± 5% (max 168 g - min 152 g)	
Fuel Content (LOI)	% of mass	20%	
Treatment Type		Alkali-resistant without emollients	
Dimensions Wheelbase	mm	3,5 x 3,8	

Tensile strength (TS) and elongation:
Minimum tensile strength (N/50 mm) and maximum elongation (%) is ascertained according to DIN EN ISO 13934-1 as follows


	Tensile strength		Elongation
	Nominal Value	Individual Value	Average Value
Deposition method			
Standard Conditions	2000 / 2200	1900 / 1900	3,8 / 3,8
Solution 5% NaOH	1140 / 1300	1200 / 1200	3,5 / 3,5
Quick Test	1500 / 1700	1250 / 1250	3,5 / 3,5
Solution 3 iont		1000 / 1000 50 % / 50 %	

Tolerances:
 Setting: ± 5% in Warp and Weft
 Height: ± 1%
 Length: ± 2%
 LOI: ± 3%

Quality Inspection

The mode of quality control, taking samples and shooting the material, is according to standard 0326 works. **Packing:**
 The rolls are packed vertically in cardboard boxes on a pallet. **Warehouse:**
 Rolls must be stored in a dry place. Storage temperature -10 °C to + 50 °C.

EXPANSION JOINT PLUS

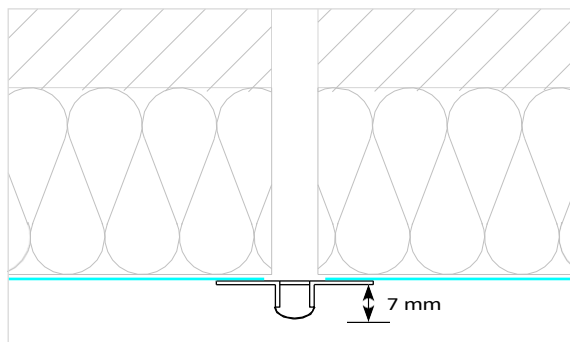

2. USE

Used as a junction between insulation panels at building joints aiding the absorption of structural settlement movements in the continuous walls.
It also serves as a guide for laying plaster and/or applying liquid sheaths.

3. SPECIFICATION ITEMS

Entry	Description	U.M.	Price
Dak.B.ZIN33.1669D	<p>Supply and installation of expansion joint plus with pre-assembled mesh with PVC core, with transparent joint and with anti-cracking glass fibre mesh for "a cappotto" insulation, made of E-glass fibre with 20% anti-alkaline sizing, raw fabric weight equal to 131 g. The weight of the treated fabric shall be 160 g/m² (with an appreciable deviation of 5%). The mesh size shall be 3.5 x 3.8 mm. The breaking load of the mesh in standard conditions shall have a nominal value equal to and not less than 2,000 N/50 mm warp direction, 2,200 N/50 mm weft direction, individual value equal to 1,900 N/50 mm warp direction, 1,900 N/50 mm weft direction. The elongation shall be as an average value close to 3.8 in warp direction and 3.8 in weft direction.</p> <p>The product must be laid with the mesh placed in the layer of adhesive, taking care that it is perfectly embedded, using a notched trowel or float for this purpose. The joint must be laid over the joint filled with insulating material and also well secured at the corners. Its use makes it possible to compensate for different expansion in the masonry, prevents pollutants and moisture from entering the joint, and is weatherproof. Overlaps with the mesh should never be less than 10 cm. It must be perfectly smoothed down to the product's limit.</p> <p>On site, the product must be delivered in cardboard boxes, bearing a control code. Dimensions h. 7 x 2,500 mm.....</p>	cf.	-