


PVC 3D PLUS WINDOW PROFILE

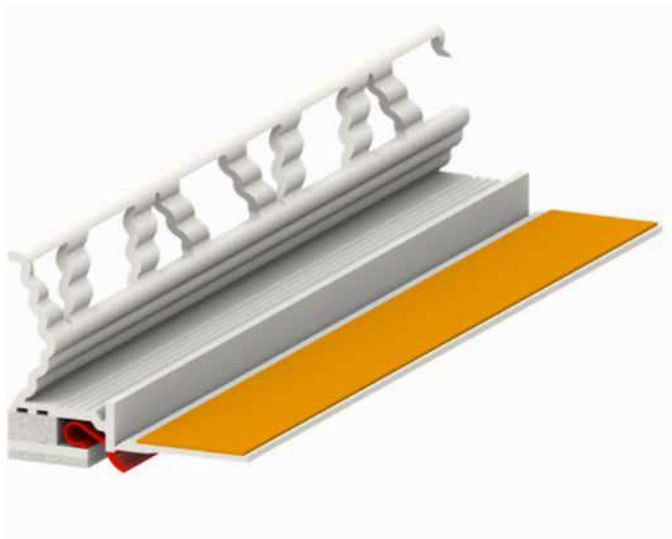

INDEX

1. Data and Documentation
2. Description
3. Use
4. Specifications

1. DATA AND DOCUMENTATION

Code	Description	Measures mm	Quantity cf.	Weight (kg/cf.)	Pkg. / Pallet
ZIN33-1792	3D PLUS PVC window profile	2.400	72 m (30 bars)	8	40 cf. / 1,200 m.
ZIN33-1793	3D PVC window profile	2.400	72 m (30 bars)	8	40 cf. / 1,200 m.

MATERIAL Made of PVC

2. DESCRIPTION

Two-piece self-adhesive PVC profile assembled with flexible TPE to absorb movement. The profile is equipped with PE sealing tape with or without a protective lip, as well as a flexible connector.

ZIN33-1792 PLUS version, with side fin equipped with fixing tape to protect the frame and glass.

Conforms to Standard UNI 1175:2018 CLASS 3D.

3. USE





Used on the window frame as a tight fitting on the plaster sash. It is equipped with a removable adhesive protective flap that allows the glass to be protected during smoothing.

It promotes the reduction of thermal bridges and absorbs expansion.

PVC 3D PLUS WINDOW PROFILE

ZIN33-1792

ZIN33-1793

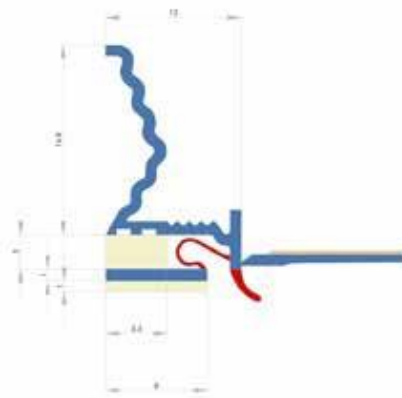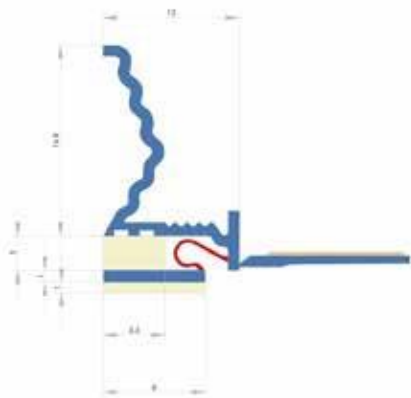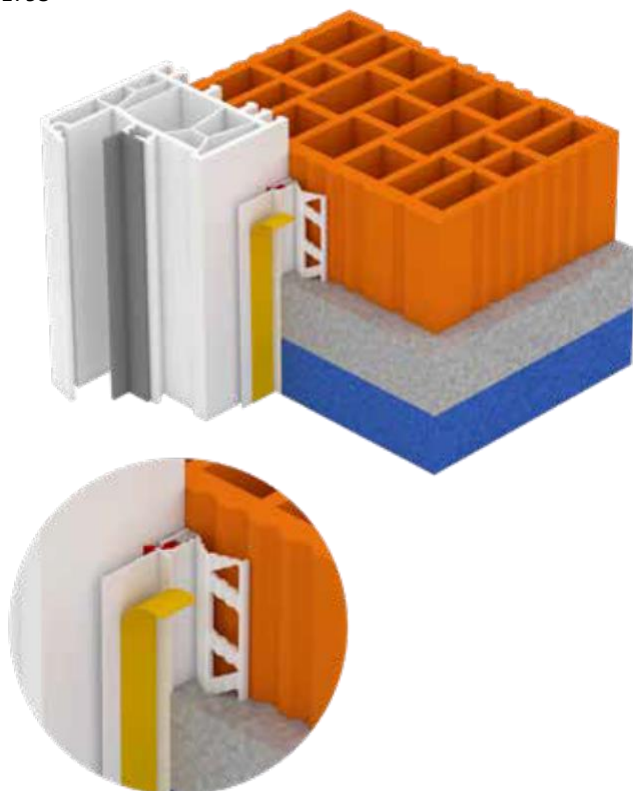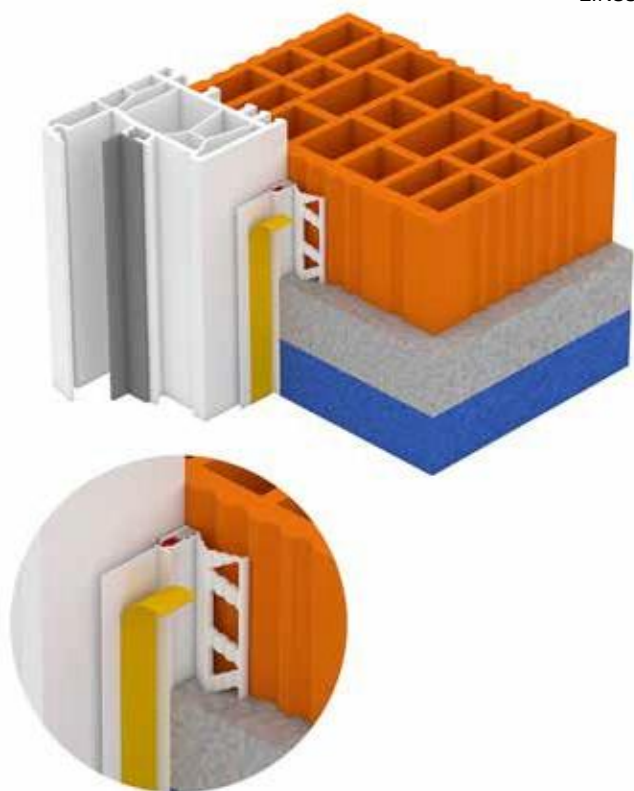

4. SPECIFICATION ITEMS

Entry	Description	U.M.	Price
Dak.B.ZIN33.179x	Two-piece self-adhesive PVC profile assembled with flexible TPE fitted with PE sealing tape with or without protective lip, plus flexible fitting		
Dak.B.ZIN33.1792	Dimensions 2,400 mm.....	cf.	-
Dak.B.ZIN33.1793	Dimensions 2,400 mm.....	cf.	-