


SOFTLINE COMFORT INSPECTION DOOR

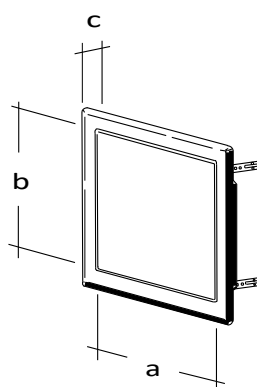

	a (nom)	b (nom)	c	
6770	150	150	20	mm
6772	200	200	20	mm
6774	250	250	20	mm
6776	300	300	20	mm
6778	400	400	20	mm
6780	500	500	20	mm
6782	600	600	20	mm

INDEX

1. Data and Documentation
2. Use
3. Specification item

1. DATA AND DOCUMENTATION

Code	Description	Dimensions (mm)	Pkg.	Pallet	Weight
GAN01-6770	Softline Comfort Prepainted with Snap Closure	150 x 150	1 pc.	300 pcs.	400 g/pcs.
GAN01-6772	Softline Comfort Prepainted with Snap Closure	200 x 200	1 pc.	240 pcs.	600 g/pcs.
GAN01-6774	Softline Comfort Prepainted with Snap Closure	250 x 250	1 pc.	100 pcs.	800 g/pcs.
GAN01-6776	Softline Comfort Prepainted with Snap Closure	300 x 300	1 pc.	120 pcs.	960 g/pcs.
GAN01-6778	Softline Comfort Prepainted with Snap Closure	400 x 400	1 pc.	55 pcs.	1,440 g/pc.
GAN01-6780	Softline Comfort Prepainted with Snap Closure	500 x 500	1 pc.	50 pcs.	2,700 g/pcs.
GAN01-6782	Softline Comfort Prepainted with Snap Closure	600 x 600	1 pc.	35 pcs.	3,300 g/pcs.

2. USE

Used for ceilings, walls and counter walls.

3. SPECIFICATION ITEMS

Entry	Description	Unit	Price
Dak.B.GAN01.67xx	Supply and installation of pre-painted inspection hatch with push-to-open/close door, releasable and installable with left or right-hand opening. Individually packaged in a box. Frame and panel made of pre-painted galvanised sheet metal in white (RAL 9016). Used for suspended ceiling, wall and counter wall. Delivered to the construction site in a cardboard box with a label showing the product characteristics.		
Dak.B.GAN01.6770	Dimensions 150 x 150 mm - thickness 20 mm.....	pc.	-
Dak.B.GAN01.6772	Dimensions 200 x 200 mm - thickness 20 mm.....	pc.	-
Dak.B.GAN01.6774	Dimensions 250 x 250 mm - thickness 20 mm.....	pc.	-
Dak.B.GAN01.6776	Dimensions 300 x 300 mm - thickness 20 mm.....	pc.	-
Dak.B.GAN01.6778	Dimensions 400 x 400 mm - thickness 20 mm.....	pc.	-
Dak.B.GAN01.6780	Dimensions 500 x 500 mm - thickness 20 mm.....	pc.	-
Dak.B.GAN01.6782	Dimensions 600 x 600 mm - thickness 20 mm.....	pc.	-