

# CHANNEL DAKUA+ WITH STAINLESS STEEL GRATING OBLI



## INDEX


1. Code Registry
2. Use
3. Technical Specification

### 1. Code Registry

| Code            | Description   | Dimension (mm) | Weight      | Colour | Pkg. / Pallet   |
|-----------------|---|----------------|-------------|--------|-----------------|
| POZ93-118500/R  | Kit - Channel Dakua+ with Stainless Steel Grating Oblì - 500  | 78 x 500       | 1,50 kg/pcs | Steel  | 1 pcs / 108 pcs |
| POZ93-118600/R  | Kit - Channel Dakua+ with Stainless Steel Grating Oblì - 600  | 78 x 600       | 1,70 kg/pcs | Steel  | 1 pcs / 90 pcs  |
| POZ93-118700/R  | Kit - Channel Dakua+ with Stainless Steel Grating Oblì - 700  | 78 x 700       | 2,00 kg/pcs | Steel  | 1 pcs / 81 pcs  |
| POZ93-118800/R  | Kit - Channel Dakua+ with Stainless Steel Grating Oblì - 800  | 78 x 800       | 2,30 kg/pcs | Steel  | 1 pcs / 54 pcs  |
| POZ93-118900/R  | Kit - Channel Dakua+ with Stainless Steel Grating Oblì - 900  | 78 x 900       | 2,60 kg/pcs | Steel  | 1 pcs / 55 pcs  |
| POZ93-1181000/R | Kit - Channel Dakua+ with Stainless Steel Grating Oblì - 1000 | 78 x 1000      | 2,90 kg/pcs | Steel  | 1 pcs / 56 pcs  |

### MATERIAL

Grating and channel body made of AISI 304 stainless steel, trap siphoned element and outlet body made of Abs, waterproof polyester fabric.

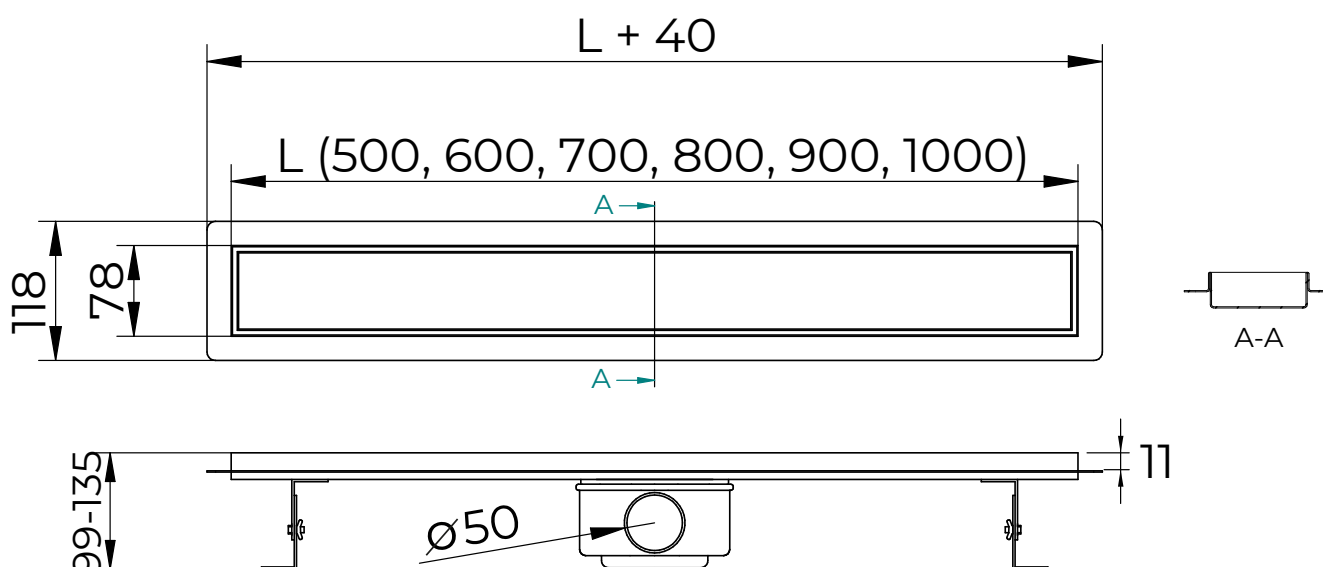

# CHANNEL DAKUA+ WITH STAINLESS STEEL GRATING OBLI

## 2. Use

This channel has to be installed on the floor, for the collection of shower/toilet waters. It guarantee aesthetic uniformity, ease of positioning on the ground. Positioning itself against the wall at the connection point between floor and wall.

## 3. TECHNICAL SPECIFICATION

| Specification                | Description   | Unity | Price |
|------------------------------|---|-------|-------|
| <b>Dak.D.POZ93.118x00/R</b>  | Supply and installation of drainage Channel with a modern, essential and funtional design.<br>The block body channel is made up of AISI 304 stainless with a 90° bended external edge that allow to be installed closed to the wall. Moreover, thanks to the absense of welds and screws, ensures easy cleaning and high hygiene standards.<br>The body channel, contains a siphon, a removable basket and a 360° adjustable and removable gasket.<br>The flow rate (44 litres/min) is high, even with lowered heights.<br>The interchangeable grating has a oblique opening design and it is available in polished stainless steel.<br>The kit is ready for installation, with the provided preassembled grating and includes a waterproof pre-cut polyester sheet, which is shaped to the edge of the channel to protect it against infiltration under the floor.<br>Grating and channel body made of AISI 304 stainless steel, trap siphoned element and outlet body made of Abs, waterproof polyester fabric.<br>This channel has to be installed on the floor, for the collection of shower/toilet waters. It guarantee aesthetic uniformity, ease of positioning on the ground. Positioning itself against the wall at the connection point between floor and wall. |       |       |
| <b>Dak.D.POZ93.118500/R</b>  | Grating Obli - 500 mm.....  | pcs   | -     |
| <b>Dak.D.POZ93.118600/R</b>  | Grating Obli - 600 mm.....  | pcs   | -     |
| <b>Dak.D.POZ93.118700/R</b>  | Grating Obli - 700 mm.....  | pcs   | -     |
| <b>Dak.D.POZ93.118800/R</b>  | Grating Obli - 800 mm.....  | pcs   | -     |
| <b>Dak.D.POZ93.118900/R</b>  | Grating Obli - 900 mm.....  | pcs   | -     |
| <b>Dak.D.POZ93.1181000/R</b> | Grating Obli - 1.000 mm.....  | pcs   | -     |