

# ROUND DRAINING WATER OUTLET



## INDEX

1. Code Registry
2. Use
3. Technical Specification

## 1. CODE REGISTRY


Code	Description	Dimension (mm)	Colour	Weight	Pkg. / Pallet
BOC02-1115T8	Round draining water outlet	ø 80	Black	0,436 kg/pc.	20 pcs. / 200 pcs.
BOC02-1115T10	Round draining water outlet	ø 100	Black	0,460 kg/pc.	16 pcs. / 160 pcs.

**MATERIAL** Made of TPE (thermoplastic elastomer).

## 2. USE

Used for the complete evacuation of rainwater in roof.

- Apply a coat of primer in the area around the hole.
- Apply a first layer of cover membrane.
- Insert the plug in the hole and mark the point in which it must be cut.
- Heat the surface of the waterproof membrane, then adhere to the outlet flange.
- Heat a small piece of membrane. Spread with a spatula on the flange to enable the pipe to adhere to the cover membrane.
- Apply a second waterproofing layer, heating the bitumen, after covering both the flange and the membrane.

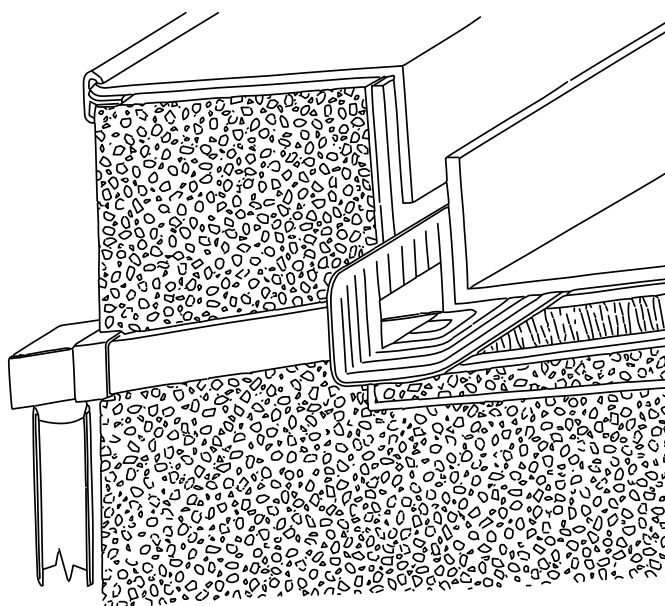

# ROUND DRAINING WATER OUTLET

## 3. TECHNICAL SPECIFICATION

Specification	Description	Unity	Price
<b>Dak.O.BOC02.1115Tx</b>	Supply and installation of draining outlet consists in a flange corner and a circular tube long 500 mm. Made of TPE (thermoplastic elastomer). Used for the complete evacuation of rainwater in roof.		
<b>Dak.O.BOC02.1115T8</b>	Dimension $\varnothing$ 80 mm.....	pc.	-
<b>Dak.O.BOC02.1115T10</b>	Dimension $\varnothing$ 100 mm.....	pc.	-