


# STARTER BASE PROFILE KIT

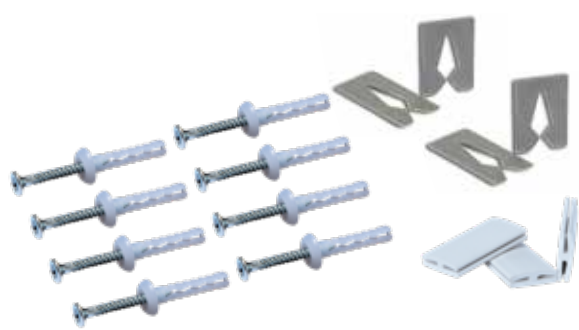

## INDEX

1. Code Registry
2. Use
3. Technical specification

## 1. CODE REGISTRY

Code	Description	Dimensions (mm)	Weight	Colour	Pkg. / Pallet
ZIN32-1680K	Starter track profile Kit	in bag	500 gr./bag	-	1 bag / - bags.

**MATERIAL** Made of PVC and aluminum.

## 2. USE

Used for splicing horizontally the starting track preventing detachment caused by subsidence (temperature changes).

## 3. TECHNICAL SPECIFICATION

Specification	Description	Unity	Price
<b>Dak.B.ZIN32.1680K</b>	Supply and installation of kit consists of: 75 hammering anchors 6 x 60 mm for fixing (TER11-2329) the starting base. 50 spacers from 3 mm for a better linearity of the base in case of irregularities on the support wall (ZIN32-1680/D3). 10 junction elements for bases of aluminum to maintain the coplanarity (ZIN32-1680G). Made of PVC and aluminum. Used for splicing horizontally the starting track preventing detachment caused by subsidence (temperature changes).	bag.	-