

WINDOWS PROFILE PLUS



INDEX


1. Code Registry
2. Use
3. Technical specification

1. CODE REGISTRY

Code	Description	Dimensions (mm)	Weight	Colour	Pkg. / Pallet
ZIN33-1691	Windows profile Plus	120 x 2.400	8,00 kg/box.	Bianco	72 m / 36 box.

MATERIAL

Made of PVC and fiber glass mesh.

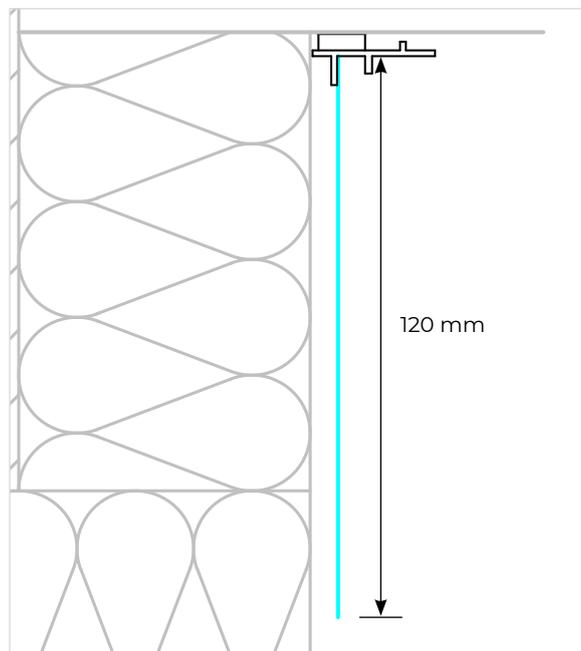

Characteristics	Units Description	R131	
		Warp	Weft
Setting	per 10 cm	25 x 2	20,5
Standard height	cm	110	
Roll length	m	50	
Treated Fabric Thickness	mm	0,52	
Loom state Fabric Weight	g/m ²	131	
Treated Fabric Weight	min g/m ²	160 ± 5% (max 168 gr. - min 152 gr.)	
Combustible Matter Content (LOI)	% of mass	20%	
Treatment type		alkaliresistant without emollient, obstructing yarn drifting	
Square Dimension	mm	3,5 x 3,8	

Tensile strength (TS) and elongation:

Minimum individual tensile strength (N/50 mm) and maximum elongation (%) when reaching minimum tensile strength is ascertained according DIN EN ISO 13934 - 1 as per below.

Deposition method	Tensile strength		Elongation
	Nominal value	Individual value	Average value
Standard condition	2.000 / 2.200	1.900 / 1.900	3,8 / 3,8
5 % NaOH Solution	1.140 / 1.300	1.200 / 1.200	3,5 / 3,5
Fast Test (6 hours)	1.500 / 1.700	1.250 / 1.250	3,5 / 3,5
3 ions solution		1.000 / 1.000	
		50 % / 50 %	

Tolerances:

Setting: ± 5% in Warp and Weft
 Width: ± 1%
 Length: ± 2%
 LOI: ± 3%

Quality Inspection:

Quality inspection, sampling and material acceptance follows the Customer Acceptance Standard No. 0326.

Packing:

The rolls of fabrics are packed vertically in a cardboard box, on a wooden pallet. A precise method of packing is mentioned in the works standard for packing and can vary based on a customer request.

Storing:

Packed rolls are to be stored in dry rooms. Storing temperature is from -10 °C to +50°C.

WINDOWS PROFILE PLUS

2. USE

Used on the window frame as a sealed connection on the plaster shutter.
It is provided with a removable adhesive protective flap that allows the protection of the window glass during the application of the plaster.

3. TECHNICAL SPECIFICATION

Specification	Description	Unity	Price
Dak.B.ZIN33.1691	Supply and installation of profile with PE adhesive tape and heat-sealed fiber glass mesh, standard or R131. Made of PVC and fiber glass mesh. Used on the window frame as a sealed connection on the plaster shutter. It is provided with a removable adhesive protective flap that allows the protection of the window glass during the application of the plaster. Dimension 120 x 2.400 mm.....	box.	-