

SKY ONE 2.0



INDEX

1. Code Registry
2. Use
3. Technical Specification


1. CODE REGISTRY

Code	Description	Clear Hole (mm)*	Dimensions (mm)**	Colour	Weight (kg/pc)	Pkg / Pallet
LUC12-1190	Dark brown Sky One 2.0 attic window - 450 x 500	440 x 530	406 x 496	Dark brown	9,55 kg/pc.	1 pc. / 20 pcs.
LUC12-1191	Brick red Sky One 2.0 attic window - 450 x 550	440 x 530	406 x 496	Brick red	11,70 kg/pc.	1 pc. / 20 pcs.

* frame: external dimensions ** frame: internal dimensions

MATERIAL

Made of painted sheet dark brown, solid spruce wood, tempered glass and aluminium.

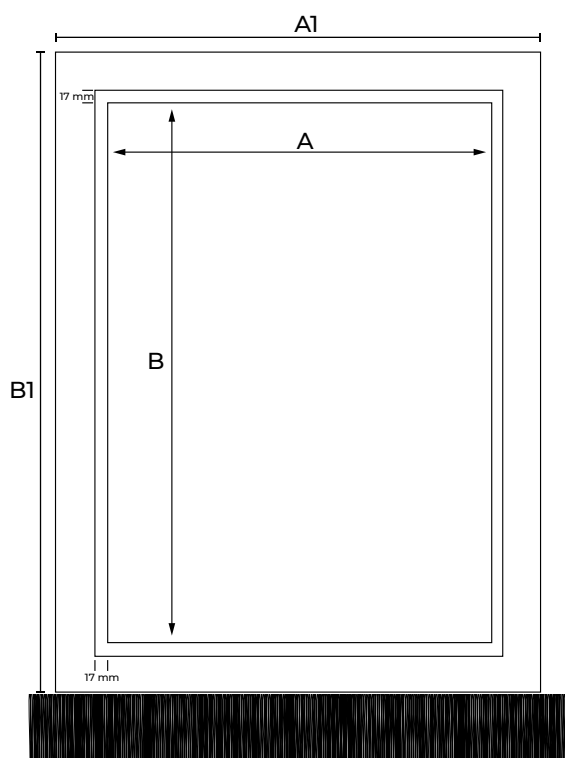

REAR VIEW

Codice	A1 x B1	A x B
LUC12-1190	440 x 530	406 x 496
LUC12-1191	440 x 530	406 x 496








SKY ONE 2.0

2. USE

Used in attics not intended for residential use or over only passage rooms.

Caratteristiche generali	Risultati	Specifiche tecniche di riferimento
Resistenza al carico del vento	Class C3	EN 14351-1+A1:2010 EN 12210 / 2002
Resistenza al carico della neve e a carichi permanenti.	4 - 11 - 4 mm (1,8 kN/m ²)	EN 14351-1+A1:2010 EN 1991-1-3 Eurocode 1
Tenuta stagna	4A-150Pa	EN 14351-1+A1:2010 EN 12208 / 2002
Permeabilità all'aria	Class 3	EN 14351-1+A1:2010 SR EN 12207 / 2002
Resistenza agli urti	Class 2 (300 mm)	EN 14351-1+A1:2010 SR EN 13049:2004
Performance acustica Rw(C/Ctr)	34 dB	EN 14351-1+1+A1:2010, Anexa B
Capacità di carico del dispositivo di sicurezza	pass (350N per 60s)	EN 14351-1+1+A1:2010, item.4.8
Trasmittanza termica Uw	4.91 W/(m ² K)	EN 14351-1+A1:2010 EN ISO 10077-1:2000
Proprietà di radiazione	0.89/0.08/0.08	EN 14351-1+A1:2010
Sostanze pericolose	np	EN 14351-1+A1:2010
Reazione al fuoco	np	EN 14351-1+A1:2010
Performance al fuoco esterno	np	EN 14351-1+A1:2010

SKY ONE 2.0

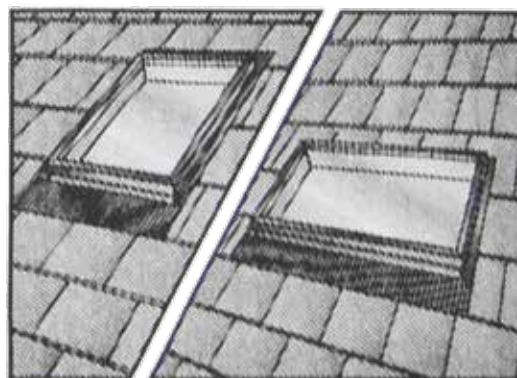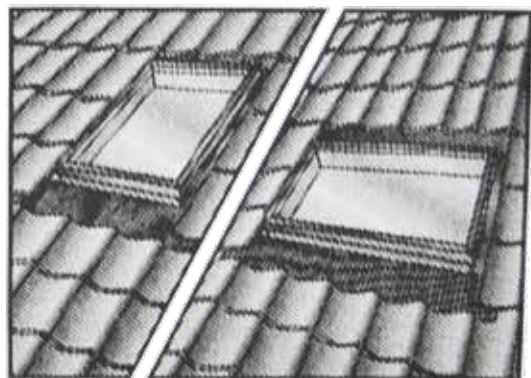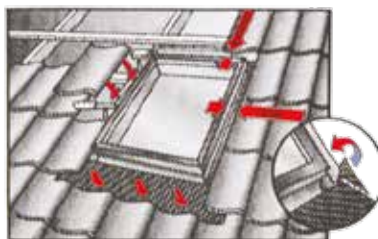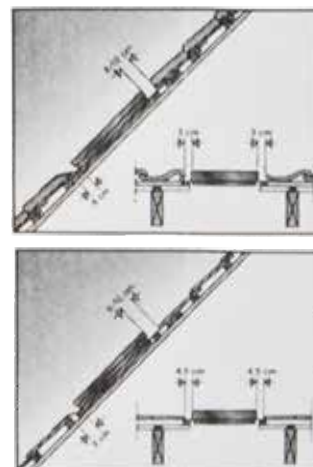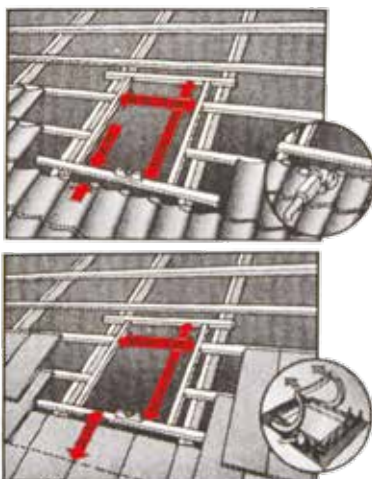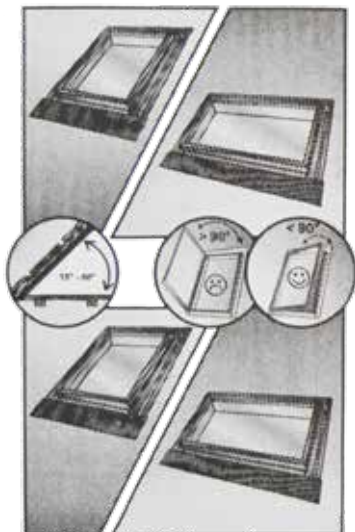

3. TECHNICAL SPECIFICATION

Specification	Description	Unity	Price
Dak.R.LUC12.119x	Supply and installation of monoblock attic window, pivot hinge with one panel of 4 mm tempered glass. Spruce wooden solid waxed frame, ergonomic handle and aluminium pleated strip with butilic adhesive. Available in 450 x 550 mm, brick red and dark brown colours. Made of painted sheet, solid spruce wood, tempered glass and aluminium. Used in attics not intended for residential use or over only passage rooms.		
Dak.R.LUC12.1190	Dark brown - Dimensions 450 x 550 mm.....	pc.	-
Dak.R.LUC12.1191	Brick red - Dimensions 480 x 550 mm.....	pc.	-