

# PROTECTIVE TAPE FOR JOIST



## INDEX

1. Code registry
2. Use
3. Description
4. Features
5. Technical specification

## 1. CODE REGISTRY

Code	Description	Measure (mm)	Weight (kg)	Pkg / Pallet
TER09-1188	Protective tape for joist	80 x 20.000 th. 2	0,32	27 pcs / 256 pcs

**MATERIAL** Made of stretch polyethylene

## 2. USE

Used to protect the joist and waterproof the overall structure.


## 3. DESCRIPTION

Single-sided adhesive tape for fixing and protecting joists, before the installation of decking boards.

# PROTECTIVE TAPE FOR JOIST

## 4. FEATURES

CHARACTERISTICS (dimensional tolerances ±15%)	TEST METHOD	VALUE
THICKNESS	Internal	3,5 -2 mm
DENSITY	Internal	30
STANDARD COLORS		DARK GRAY MATTE
ACUSTICAL IMPROVEMENT OF THE PRODUCT ONLY $R_w$ ACCORDING TO RESEARCH DATA IN OUR POSSESSION.	UNI EN ISO 10140-3:2010	2 dB
DYNAMIC RIGIDITY $MN/m^3$	UNI EN 29052-1:1993	45
THERMAL CONDUCTIVITY	EN 12667 AVERAGE VALUE BASED ON LABORATORY CERTIFICATES AND DATA IN OUR POSSESSION	0,040 W/mK A 10° C
TEMPERATURE OF USE		-20 +80° C
VERTICAL COMPRESSION RESISTANCE KPa FOR SP- 3.5 MM	UNI EN ISO 7214-2008	SEE TABLE BELOW
RESISTANCE TO MOLD AND INSECTS		EXCELLENT
DOES NOT CONTAIN CFC (FREON)		IN ACCORDANCE WITH LAW NO. 549 OF 12/28/93
ADHESIVE SIDE ADHESIVE		HOT MELT BASE
ADHESIVE COVER		PLASTIC FILM
COMPRESSIVE STRENGTH		
MASS PER EACH $M^2$ OF SURFACE ( $Kg/m^2$ )	PRESSURE EXERCITED BY THE BASE ON THE SLAB (KPa)	CRUSHING SUFFERED BY THE THICKNESS. 3,5 (mm)
140	1.373,4	0,3
210	2.060,1	0,5
300	2.943	0.7

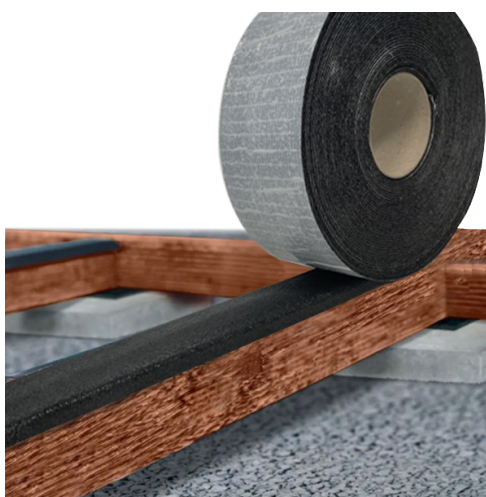

## 5. TECHNICAL SPECIFICATION

Item	Description	Unit	Price
<b>Dak.D.TER09.1188</b>	Supply and installation of protective tape for joist Made of stretch polyethylene Used for the protection of joist for floor	pc.	-