

# ARKIMEDE 41 - PAVING | SELF-LEVELING







## INDICE

1. Code registry
2. Description
3. Use
4. Fiedls of use
5. Load test
6. Technical specification

## 1. CODE REGISTRY

Code	Description	Measure (mm)	Weight (kg)	Pkg / Pallet
TER09-1193/4A2M	ARKIMEDE 41 self-leveling - spacer tabs 2 mm thickness	from 41 to 66	0,24	30 pcs. / 1.350 pcs.
TER09-1193/4A4M	ARKIMEDE 41 self-leveling - spacer tabs 4 mm thickness	from 41 to 66	0,24	30 pcs. / 1.350 pcs.

**MATERIAL** Made of PP (polypropylene).

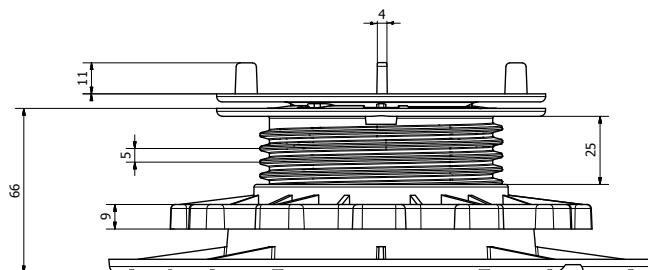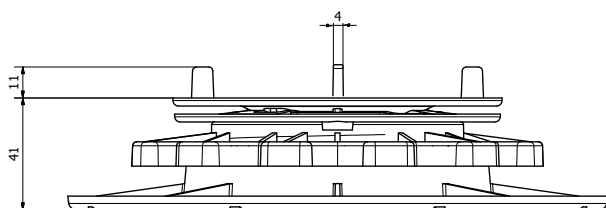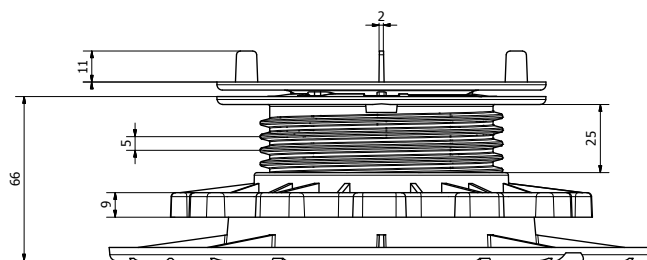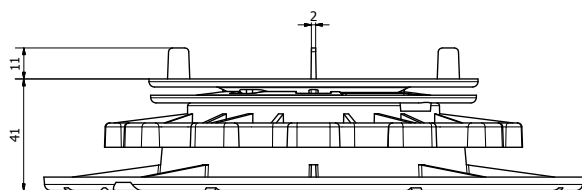

# ARKIMEDE 41 - PAVING | SELF-LEVELING

## 2. DESCRIPTION

Arkimede 41 Self-leveling is the perfect solution for you raised paving or decking. This product combines the flexibility and the extremely easy-to-use attitude of the Arkimede line (with fixed head) with the plus of a self-leveling head (for slopes from 0 to 5%). It is adjustable in height from 41 to 66mm (25, 50 and 100mm extensions excluded) and it can be matched with all Arkimede 35 accessories.

## 3. USE

Arkimede, 41 is a variable height telescopic support, from a minimum of 41mm, used for elevated external flooring. The self-leveling integrated head (for slopes up to max 5%) allows you to also be used on surfaces with different differences. With the specific extensions it is possible to extend the height of the support. Operating temperature: 40°C / +80°C.


## 4. FIELDS OF USE

The Arkimede telescopic support, 41 can only be used in external areas, on terraces, shared flooring, patios and walkable dehors. With the specific extensions it is possible to extend the height of the support.

## 5. LOAD TEST

Code	Dimensions	Max Load [N]
TER09-1193/4AxM	h = 41-66 mm	10.409

The test was made using a 150mm diameter punch

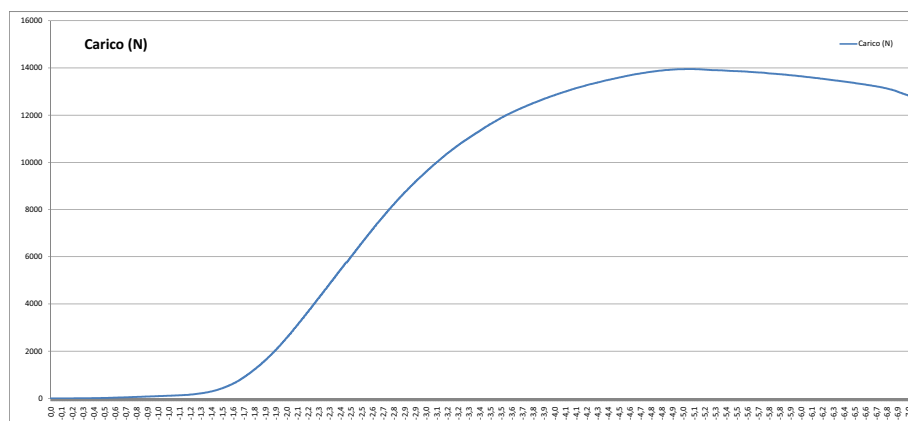

## 6. TECHNICAL SPECIFICATION

Voice	Description	Unit	Price
Dak.O.TER09.1193/4AxM	Supply and installation of self-leveling telescopic support in height from 41 to 66 mm Dimensions: height adjustable from 41 to 66 mm self-leveling head with spacer tabs 2 and 4 mm thickness. Base of 314 cm <sup>2</sup> Available in black color. Made of PP (polypropylene) Used in external areas, terraces, shared flooring.	pcs.	-
Dak.O.TER09.1193/4A2M	Arkimede 41 paving, with spacer tabs 2 mm thickness.....	pcs.	-
Dak.O.TER09.1193/4A4M	Arkimede 41 paving, with spacer tabs 4 mm thickness.....	pcs.	-